



DP14UM

COOLING CAPACITY: 23,000- 56,000 BTU/H
HEATING CAPACITY: 40,000 – 80,000 BTU/H



PACKAGED GAS / ELECTRIC
ULTRA-LOW NO_x
14 SEER / 81% AFUE
2 to 5 TONS

■ Contents

Nomenclature.....	2
Accessories	2
Product Specifications.....	3
Expanded Cooling Data	4
Airflow Data	18
Dimensions	20
Wiring Diagrams	21

■ Standard Features

- Heavy-duty stainless-steel heat exchanger
- Energy-efficient scroll compressor
- Multi-Speed ECM indoor blower motor
- Single-stage gas valve
- All-aluminum evaporator coil
- Flowrater expansion device on 2- to 4-ton units
- TXV expansion device on 5-ton units
- Power-assisted combustion
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD). For California's South Coast Air Quality Management District (SCAQMD) only: This furnace complies with the SCAQMD Rule 1111 14ng/j NO_x emission limit.
- AHRI Certified
- ETL Listed

■ Cabinet Features

- Fully insulated heavy-gauge, zinc-coated steel cabinet with UV-resistant powder-paint finish
- Horizontal or downflow application
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Compressor sound blanket
- Convenient access panels
- One roof curb fits all units
- One foot print: two heights
- Bottom, 2" high base rails for easier handling
- One footprint; two heights
- When properly anchored, meets the 2017 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete Warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Warranty (good for as long as you own your home), and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

	D	P	14	U	M	24	060	4	1	A	A	
	1	2	3,4	5	6	7,8	9,10,11	12	13	14	15	
Brand												Engineering
D - Daikin												Minor revision
Product Type												Engineering
P - Packaged												Major revision
SEER												Voltage
14 - 14 SEER												1 - 208/230V single-phase, 60 Hz
Unit Type												Refrigerant
U - Ultra Low NO _x ≤14ng/J												4 - R-410A
Configuration												Nominal Heat Input
M - Multi-position												040 40,000 BTU/H
												060 60,000 BTU/H
												080 80,000 BTU/H
												Tonnage Nominal
												24 - 2 tons 36 - 3 tons 48 - 4 tons
												30 - 2½ tons 42 - 3½ tons 61 - 5 tons

ACCESSORIES

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer	DDNECNJPGMM	DDNECNJPGML
Downflow Internal Filter Rack (with Economizer)	DDNIFRPGMM	N/A (built into economizer)
Downflow Internal Filter Rack (no Economizer)	DDNIFRPGA	DDNIFRPGA
Downflow Manual Damper	DDN25FDPGCHMM	DDN25FDPGCHML
Downflow Motorized Damper	DDN25MFDPGCHMM	DDN25MFDPGCHML
Downflow Square to Round	SQRPG101/102	SQRPG103
Economizer Wiring Harness (2-4 Ton)	0259G00214	0259G00214
Economizer Wiring Harness (5 Ton)	N/A	0259L00412
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Duct Cover	20464501NGK	20464502NGK
Horizontal Economizer	DHZEENJPGCHM	DHZEENJPGCHL
Horizontal Manual Damper	DHZ25FDPGCHMM	DHZ25FDPGCHML
Horizontal Motorized Damper	DHZ25MFDPGCHMM	DHZ25MFDPGCHML
Horizontal Square to Round	SQRPGH101/102	SQRPGH103
Internal Horizontal Filter Rack	DHZIFRPGCHA	DHZIFRPGCHA
Outdoor Thermostat with Housing	OTDFPKG-01	OTDFPKG-01
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

	DP14UM24 06041A*	DP14UM30 06041A*	DP14UM36 06041C*	DP14UM42 06041C*	DP14UM48 06041C*	DP14UM61 06041C*
COOLING CAPACITY						
Total BTU/h	23,000	28,500	34,200	40,000	46,500	56,000
Sensible BTU/h	18,400	22,800	27,000	30,000	36,800	42,000
SEER / EER	14.0 / 11.0	14.0 / 11.0	14.0 / 11.0	14.0 / 11.0	14.0 / 11.0	14.0 / 11
Decibels	78	78	78	78	78	78
AHRI Reference #s	207252518	207252548	207252525	207252529	207252537	207252543
HEATING CAPACITY						
Input BTU/h	40,000	60,000	60,000	80,000	80,000	80,000
Output BTU/h	31,000	48,000	48,000	64,000	64,000	64,000
AFUE	81	81	81	81	81	81
Temperature Rise Range (°F)	20 - 50	30 - 60	30 - 60	30 - 60	30 - 60	30 - 60
No. of Burners	1	1	1	1	1	1
Orifice Size	#31	#25	#25	#17	#17	#17
EVAPORATOR MOTOR						
Type	EEM	EEM	EEM	EEM	EEM	EEM
Wheel (D x W)	10" x 8"	10" x 8"	10" x 9"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	800	1,000	1,200	1,300	1,525	1325 L / 1700 H
Motor Speed Tap (Cooling)	T4	T4	T4	T4	T4	T3 L / T4 H
Horsepower	1/2	1/2	1/2	3/4	3/4	1
EVAPORATOR COIL						
Face Area (ft²)	4.3	4.3	4.3	5.7	5.7	5.7
Rows Deep/Fins per Inch	3/14	3/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.057	0.062	0.068	0.072	0.076	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	75	78	92	103	99	100
CONDENSER FAN / COIL						
Horsepower - RPM	1/6 - 815	1/4 - 1,075	1/4 - 1,075	1/4 - 1,075	1/3 - 1,122	1/3 - 1,122
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,150	3,050	2,850	3,300	3,000	3,000
Face Area (ft²)	12.3	12.3	11.1	15.4	14.4	14.4
Rows Deep/Fins per Inch	1/24	1/24	2/27	1/24	2/27	2/27
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Two
Compressor RLA/LRA	13.5 / 58.3	14.1 / 73	14.1 / 77.0	17.9 / 112	18.5 / 124	22.9 / 147.2
ELECTRICAL DATA						
Voltage-Phase (Frequency 60Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Indoor Blower FLA/LRA	3.8	3.8	3.8	5.4	5.4	7
Outdoor Fan FLA/LRA	0.95/2.0	1.4 / 3.2	1.4 / 3.2	1.4 / 3.2	2.0 / 4.4	2.0 / 4.4
Min. Circuit Ampacity ¹	21.6	22.8	22.8	29.2	30.5	37.6
Max. Overcurrent Protection ²	35 amps	35 amps	35 amps	45 amps	45 amps	60 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"
OPERATING / SHIP WEIGHTS (LBS)	412 / 435	420 / 442	496 / 520	523 / 545	533 / 555	533 / 555

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
889	MBh	22.7	23.5	25.8	-	22.2	23.0	25.2	-	21.7	22.4	24.6	-	21.1	21.9	24.0	-	20.1	20.8	22.8	-	18.6	19.3	21.1	-	18.6	19.3	21.1	-		
	S/T	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.89	0.74	0.51	-	0.92	0.77	0.53	-	0.93	0.77	0.54	-	0.93	0.77	0.54	-		
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-		
	kW	1.44	1.47	1.51	-	1.55	1.58	1.64	-	1.65	1.69	1.74	-	1.74	1.78	1.84	-	1.81	1.86	1.92	-	1.88	1.92	1.99	-	1.88	1.92	1.99	-		
	Amps	6.6	6.8	6.9	-	7.1	7.2	7.4	-	7.6	7.7	8.0	-	8.0	8.2	8.4	-	8.5	8.7	8.9	-	8.9	9.1	9.4	-	8.9	9.1	9.4	-		
792	HI PR	236	254	269	-	265	286	302	-	302	325	343	-	344	370	391	-	387	416	439	-	427	460	485	-	427	460	485	-		
	LO PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-	141	150	164	-		
	MBh	22.0	22.8	25.0	-	21.5	22.3	24.5	-	21.0	21.8	23.9	-	20.5	21.3	23.3	-	19.5	20.2	22.1	-	18.0	18.7	20.5	-	18.0	18.7	20.5	-		
	S/T	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.88	0.74	0.51	-	0.88	0.74	0.51	-		
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	19	16	12	-		
80	kW	1.42	1.46	1.50	-	1.54	1.57	1.62	-	1.64	1.67	1.73	-	1.72	1.76	1.82	-	1.80	1.84	1.90	-	1.86	1.91	1.97	-	1.86	1.91	1.97	-		
	Amps	6.6	6.7	6.9	-	7.0	7.2	7.4	-	7.5	7.7	7.9	-	8.0	8.1	8.4	-	8.4	8.6	8.8	-	8.8	9.0	9.3	-	8.8	9.0	9.3	-		
	HI PR	234	252	266	-	263	283	299	-	299	322	340	-	340	366	387	-	383	412	435	-	423	455	481	-	423	455	481	-		
	LO PR	111	119	129	-	118	125	137	-	122	130	142	-	129	137	149	-	135	143	157	-	139	148	162	-	139	148	162	-		
	MBh	20.3	21.1	23.1	-	19.9	20.6	22.6	-	19.4	20.1	22.0	-	18.9	19.6	21.5	-	18.0	18.6	20.4	-	16.7	17.3	18.9	-	16.7	17.3	18.9	-		
694	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-		
	ΔT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-		
	kW	1.39	1.42	1.47	-	1.50	1.53	1.58	-	1.60	1.63	1.69	-	1.68	1.72	1.78	-	1.75	1.79	1.85	-	1.82	1.86	1.92	-	1.82	1.86	1.92	-		
	Amps	6.4	6.6	6.7	-	6.9	7.0	7.2	-	7.4	7.5	7.7	-	7.8	7.9	8.2	-	8.2	8.4	8.6	-	8.6	8.8	9.1	-	8.6	8.8	9.1	-		
	HI PR	227	244	258	-	255	274	290	-	290	312	329	-	330	355	375	-	371	400	422	-	410	442	466	-	410	442	466	-		
LO PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-	135	144	157	-			

		Outdoor Ambient Temperature																															
		65					75					85					95					105					115						
IDB	Airflow	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75		
		Entering Indoor Wet Bulb Temperature																															
889	MBh	23.5	24.0	25.7	27.4	23.0	23.5	25.1	26.8	22.4	22.9	24.5	26.2	21.9	22.3	23.9	25.5	20.8	21.2	22.7	24.2	19.2	19.7	21.0	22.5	18.7	19.1	20.4	21.8	18.7	19.1	20.4	21.8
	S/T	1.00	0.95	0.77	0.57	1.00	1.00	0.80	0.60	1.00	1.00	0.82	0.61	1.00	1.00	0.84	0.63	1.00	1.00	0.88	0.65	1.00	1.00	0.88	0.66	1.00	1.00	0.88	0.66	1.00	1.00	0.88	0.66
	ΔT	24	23	20	16	24	24	21	17	23	24	21	17	23	23	21	17	21	22	21	16	20	20	19	15	20	20	18	17	22	22	20	16
	kW	1.46	1.49	1.54	1.59	1.58	1.61	1.66	1.72	1.68	1.72	1.77	1.83	1.77	1.81	1.87	1.94	1.85	1.89	1.95	2.02	1.91	1.96	2.02	2.09	1.85	1.89	1.94	2.00	1.90	1.94	2.01	2.08
	Amps	6.7	6.9	7.1	7.3	7.2	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.2	8.3	8.6	8.9	8.6	8.8	9.1	9.4	9.1	9.3	9.5	9.9	8.6	8.8	9.1	9.4	9.1	9.3	9.5	9.9
	HI PR	241	260	274	286	271	291	308	321	308	331	350	365	351	377	399	416	395	425	448	468	436	469	495	517	436	469	495	517	436	469	495	517
	LO PR	115	122	133	142	121	129	141	150	126	134	147	156	133	141	154	164	139	148	161	172	144	153	167	178	144	153	167	172	144	153	167	178
792	MBh	22.8	23.3	24.9	26.6	22.3	22.8	24.3	26.0	21.8	22.2	23.8	25.4	21.2	21.7	23.2	24.8	20.2	20.6	22.0	23.5	18.7	19.1	20.4	21.8	18.7	19.1	20.4	21.8	18.7	19.1	20.4	21.8
	S/T	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	0.99	0.80	0.60	1.00	1.00	0.84	0.62	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.62	1.00	1.00	0.84	0.63
	ΔT	25	24	21	17	26	25	21	17	25	25	22	17	25	25	22	17	23	24	21	17	22	22	20	16	23	24	21	17	22	22	20	16
	kW	1.45	1.48	1.53	1.58	1.56	1.60	1.65	1.71	1.66	1.70	1.76	1.82	1.75	1.79	1.86	1.92	1.83	1.87	1.94	2.00	1.90	1.94	2.01	2.08	1.85	1.89	1.94	2.00	1.90	1.94	2.01	2.08
	Amps	6.7	6.8	7.0	7.2	7.1	7.3	7.5	7.7	7.7	7.8	8.0	8.3	8.1	8.3	8.5	8.8	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.8	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.8
		HI PR	239	257	271	283	268	288	305	318	305	328	346	361	347	374	395	412	391	420	444	463	432	464	490	512	432	464	490	512	432	464	490
	LO PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	152	162	138	146	160	170	142	151	165	176	142	151	165	170	142	151	165	176
694	MBh	21.1	21.5	23.0	24.6	20.6	21.0	22.5	24.0	20.1	20.5	21.9	23.4	19.6	20.0	21.4	22.9	18.6	19.0	20.3	21.7	17.2	17.6	18.8	20.1	17.2	17.6	18.8	20.1	17.2	17.6	18.8	20.1
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.56	1.02	0.95	0.78	0.58	1.05	0.99	0.81	0.60	1.06	1.00	0.81	0.61	1.06	1.00	0.81	0.60	1.06	1.00	0.81	0.61
	ΔT	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	18	26	25	22	17	24	23	20	16	26	25	22	17	24	23	20	16
	kW	1.41	1.44	1.49	1.54	1.52	1.56	1.61	1.66	1.62	1.66	1.71	1.77	1.71	1.75	1.81	1.87	1.78	1.82	1.89	1.95	1.85	1.89	1.95	2.02	1.78	1.82	1.89	1.95	1.85	1.89	1.95	2.02
	Amps	6.5	6.7	6.8	7.1	7.0	7.1	7.3	7.5	7.5	7.6	7.8	8.1	7.9	8.1	8.3	8.6	8.3	8.5	8.8	9.1	8.8	9.0	9.2	9.5	8.3	8.5	8.8	9.1	8.8	9.0	9.2	9.5
		HI PR	232	249	263	275	260	280	295	308	296	318	336	351	337	362	383	399	379	408	431	449	419	451	476	496	419	451	476	496	419	451	476
	LO PR	110	117	128	136	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171	138	147	160	171	138	147	160	171

889	MBh	23.9	24.4	25.5	27.2	23.4	23.8	24.9	26.6	22.8	23.2	24.3	26.0	22.2	22.7	23.7	25.3	21.1	21.5	22.6	24.1	19.6	20.0	20.9	22.3
	S/T	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.85	1.00	1.00	1.00	0.86
	ΔT	25	25	24	21	24	25	25	21	24	24	25	21	23	23	25	21	22	22	23	21	20	21	22	20
	kW	1.47	1.50	1.55	1.61	1.59	1.62	1.68	1.74	1.69	1.73	1.79	1.85	1.78	1.83	1.89	1.95	1.86	1.91	1.97	2.04	1.93	1.97	2.04	2.11
	Amps	6.8	6.9	7.1	7.3	7.2	7.4	7.6	7.8	7.8	7.9	8.2	8.4	8.2	8.4	8.6	8.9	8.7	8.9	9.1	9.4	9.1	9.3	9.6	9.9
	HI PR	244	262	277	289	273	294	311	324	311	335	353	369	354	381	403	420	399	429	453	472	440	474	500	522
	LO PR	116	123	135	144	123	130	142	152	127	136	148	158	134	142	155	166	140	149	163	174	145	154	169	179
792	MBh	23.2	23.7	24.8	26.4	22.7	23.1	24.2	25.8	22.1	22.6	23.6	25.2	21.6	22.0	23.1	24.6	20.5	20.9	21.9	23.4	19.0	19.4	20.3	21.6
	S/T	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.76	1.00	1.00	0.96	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.82
	ΔT	27	27	25	22	26	27	26	22	26	26	26	22	25	26	26	22	24	24	25	22	22	23	24	21
	kW	1.46	1.49	1.54	1.59	1.58	1.61	1.66	1.72	1.68	1.72	1.77	1.83	1.77	1.81	1.87	1.94	1.85	1.89	1.95	2.02	1.91	1.96	2.02	2.09
	Amps	6.7	6.9	7.1	7.3	7.2	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.2	8.3	8.6	8.9	8.6	8.8	9.1	9.4	9.1	9.3	9.5	9.9
	HI PR	241	260	274	286	271	291	308	321	308	331	350	365	351	377	399	416	395	425	448	468	436	469	495	517
	LO PR	115	122	133	142	121	129	141	150	126	134	147	156	133	141	154	164	139	148	161	172	144	153	167	178
694	MBh	21.4	21.8	22.9	24.4	20.9	21.3	22.3	23.8	20.4	20.8	21.8	23.3	19.9	20.3	21.3	22.7	18.9	19.3	20.2	21.6	17.5	17.9	18.7	20.0
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	28	27	26	22	28	27	26	22	27	27	26	22	26	27	26	23	25	26	26	22	23	24	24	21
	kW	1.42	1.45	1.50	1.55	1.54	1.57	1.62	1.68	1.64	1.67	1.73	1.79	1.72	1.76	1.82	1.89	1.80	1.84	1.90	1.97	1.86	1.91	1.97	2.04
	Amps	6.6	6.7	6.9	7.1	7.0	7.2	7.4	7.6	7.5	7.7	7.9	8.2	8.0	8.1	8.4	8.6	8.4	8.6	8.8	9.1	8.8	9.0	9.3	9.6
	HI PR	234	252	266	277	263	283	298	311	299	321	339	354	340	366	387	403	383	412	435	454	423	455	481	501
	LO PR	111	119	129	138	118	125	137	146	122	130	142	151	129	137	149	159	135	143	156	167	139	148	162	172

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
1164	MBh	29.7	30.8	33.7	-	29.0	30.1	32.9	-	28.3	29.4	32.2	-	27.6	28.6	31.4	-	26.3	27.2	29.8	-	24.3	25.2	27.6	-	24.3	25.2	27.6	-		
	S/T	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.91	0.76	0.53	-	0.92	0.77	0.53	-	0.92	0.77	0.53	-		
	ΔT	19	16	12	-	19	16	12	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-		
	kW	1.98	2.03	2.09	-	2.13	2.18	2.25	-	2.26	2.31	2.39	-	2.38	2.43	2.51	-	2.48	2.53	2.61	-	2.56	2.62	2.71	-	2.56	2.62	2.71	-		
	Amps	8.2	8.4	8.6	-	8.8	9.0	9.2	-	9.5	9.7	9.9	-	10.0	10.2	10.6	-	10.6	10.8	11.2	-	11.2	11.4	11.8	-	11.2	11.4	11.8	-		
	HI PR	245	263	278	-	275	295	312	-	312	336	355	-	356	383	404	-	400	431	455	-	442	476	502	-	442	476	502	-		
LO PR	111	118	129	-	117	124	136	-	122	129	141	-	128	136	148	-	134	142	155	-	138	147	161	-	138	147	161	-			
80	MBh	28.8	29.9	32.8	-	28.2	29.2	32.0	-	27.5	28.5	31.2	-	26.8	27.8	30.5	-	25.5	26.4	28.9	-	23.6	24.5	26.8	-	23.6	24.5	26.8	-		
	S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-	0.88	0.73	0.51	-		
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-		
	kW	1.97	2.01	2.07	-	2.12	2.16	2.23	-	2.25	2.29	2.37	-	2.36	2.41	2.49	-	2.46	2.51	2.59	-	2.54	2.60	2.68	-	2.54	2.60	2.68	-		
	Amps	8.2	8.3	8.6	-	8.7	8.9	9.2	-	9.4	9.6	9.9	-	9.9	10.2	10.5	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-	11.1	11.3	11.7	-		
	HI PR	242	261	275	-	272	293	309	-	309	333	351	-	352	379	400	-	396	426	450	-	438	471	497	-	438	471	497	-		
LO PR	110	117	127	-	116	123	135	-	120	128	140	-	126	135	147	-	133	141	154	-	137	146	159	-	137	146	159	-			
910	MBh	26.6	27.6	30.2	-	26.0	26.9	29.5	-	25.4	26.3	28.8	-	24.8	25.7	28.1	-	23.5	24.4	26.7	-	21.8	22.6	24.7	-	21.8	22.6	24.7	-		
	S/T	0.74	0.61	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.48	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-		
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	19	16	12	-		
	kW	1.92	1.96	2.02	-	2.07	2.11	2.17	-	2.19	2.24	2.31	-	2.30	2.35	2.43	-	2.40	2.45	2.53	-	2.48	2.53	2.62	-	2.48	2.53	2.62	-		
	Amps	8.0	8.1	8.4	-	8.5	8.7	8.9	-	9.2	9.3	9.6	-	9.7	9.9	10.2	-	10.3	10.5	10.8	-	10.8	11.0	11.4	-	10.8	11.0	11.4	-		
	HI PR	235	253	267	-	264	284	300	-	300	323	341	-	342	368	388	-	384	414	437	-	425	457	482	-	425	457	482	-		
LO PR	106	113	124	-	112	120	130	-	117	124	136	-	123	130	142	-	129	137	149	-	133	141	154	-	133	141	154	-			

85	MBh	30.2	31.1	33.7	36.1	29.5	30.4	32.9	35.3	28.8	29.7	32.1	34.5	28.1	28.9	31.3	33.6	26.7	27.5	29.8	31.9	24.7	25.5	27.6	29.6	24.7	25.5	27.6	29.6
	S/T	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.65	0.42	1.00	0.89	0.68	0.43	1.00	0.93	0.70	0.45	1.00	0.93	0.71	0.46	1.00	0.93	0.71	0.46
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	21	20	16	11	20	19	15	11	20	19	15	11
	kW	2.00	2.04	2.10	2.17	2.15	2.20	2.26	2.34	2.28	2.33	2.41	2.48	2.40	2.45	2.53	2.61	2.50	2.55	2.64	2.72	2.58	2.64	2.73	2.82	2.58	2.64	2.73	2.82
	Amps	8.3	8.5	8.7	9.0	8.9	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.3	10.6	11.0	10.7	10.9	11.3	11.6	11.3	11.5	11.9	12.3	11.3	11.5	11.9	12.3
	LO PR	247	266	281	293	277	298	315	329	315	339	358	374	359	387	408	426	404	435	459	479	447	481	507	529	447	481	507	529
1037	MBh	29.3	30.2	32.7	35.1	28.6	29.5	31.9	34.3	28.0	28.8	31.2	33.4	27.3	28.1	30.4	32.6	25.9	26.7	28.9	31.0	24.0	24.7	26.8	28.7	24.0	24.7	26.8	28.7
	S/T	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.83	0.62	0.40	0.95	0.85	0.64	0.41	0.99	0.88	0.67	0.43	1.00	0.89	0.67	0.43	1.00	0.89	0.67	0.43
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	21	20	16	11
	kW	1.98	2.03	2.09	2.15	2.13	2.18	2.25	2.32	2.26	2.31	2.39	2.46	2.38	2.43	2.51	2.59	2.48	2.53	2.62	2.70	2.56	2.62	2.71	2.80	2.56	2.62	2.71	2.80
	Amps	8.2	8.4	8.6	8.9	8.8	9.0	9.2	9.5	9.5	9.7	9.9	10.3	10.0	10.2	10.6	10.9	10.6	10.8	11.2	11.5	11.2	11.4	11.8	12.2	11.2	11.4	11.8	12.2
	LO PR	245	263	278	290	275	296	312	325	312	336	355	370	356	383	404	422	400	431	455	474	442	476	502	524	442	476	502	524
910	MBh	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	166	138	147	161	171	138	147	161	171
	S/T	27.1	27.9	30.2	32.4	26.4	27.2	29.5	31.6	25.8	26.6	28.8	30.9	25.2	25.9	28.1	30.1	23.9	24.6	26.7	28.6	22.2	22.8	24.7	26.5	22.2	22.8	24.7	26.5
	ΔT	23	21	17	12	23	21	17	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11	22	20	16	11
	kW	1.94	1.98	2.04	2.10	2.08	2.13	2.19	2.26	2.21	2.26	2.33	2.40	2.32	2.37	2.45	2.53	2.42	2.47	2.55	2.63	2.50	2.56	2.64	2.73	2.50	2.56	2.64	2.73
	Amps	8.0	8.2	8.4	8.7	8.6	8.8	9.0	9.3	9.2	9.4	9.7	10.0	9.8	10.0	10.3	10.6	10.3	10.6	10.9	11.3	10.9	11.1	11.5	11.9	10.9	11.1	11.5	11.9
	LO PR	237	255	270	281	266	287	303	316	303	326	344	359	345	371	392	409	388	418	441	460	434	462	487	508	434	462	487	508

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions.

Amps: Unit amps (comp. + evaporator + condenser fan motors)

kW = Total system power

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
80	MBh	30.7	31.4	33.6	35.9	30.0	30.7	32.8	35.0	29.3	30.0	32.0	34.2	28.6	29.2	31.2	33.4	27.2	27.8	29.7	31.7	25.2	25.7	27.5	29.4	23.7	24.2	26.0	28.0	30.0	32.0
	S/T	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.84	0.62	1.00	1.00	0.87	0.65	1.00	1.00	0.87	0.65	1.00	1.00	0.87	0.65	1.00	0.87
	ΔT	24	23	20	16	24	24	20	16	23	24	20	16	23	23	21	16	21	22	20	16	20	20	19	15	20	20	19	15	20	19
	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.36	2.36	2.30	2.35	2.43	2.50	2.42	2.47	2.55	2.64	2.52	2.58	2.66	2.75	2.61	2.66	2.75	2.84	2.61	2.66	2.75	2.84	2.61
	Amps	8.3	8.5	8.8	9.0	8.9	9.1	9.4	9.7	9.7	9.6	9.8	10.1	10.4	10.2	10.4	10.7	11.1	10.8	11.0	11.4	11.7	11.4	11.6	12.0	12.4	11.4	11.6	12.0	12.4	11.4
	Hi PR	250	269	284	296	280	301	318	332	332	319	343	362	378	363	391	412	430	408	439	464	484	451	485	513	535	451	485	513	535	451
	LO PR	113	120	131	140	119	127	139	148	148	124	132	144	153	130	139	151	161	137	145	159	169	141	150	164	175	141	150	164	175	141
	MBh	29.9	30.5	32.6	34.8	29.2	29.8	31.8	34.0	28.5	29.1	31.1	33.2	27.8	28.4	30.3	32.4	26.4	27.0	28.8	30.8	24.4	25.0	26.7	28.5	23.7	24.2	26.0	28.0	30.0	32.0
	S/T	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62	1.00	0.83
	ΔT	25	24	21	17	26	24	21	17	25	24	21	17	25	25	21	17	23	24	21	17	22	22	20	16	20	20	19	15	20	19
910	kW	2.00	2.04	2.10	2.17	2.15	2.20	2.26	2.34	2.28	2.33	2.41	2.48	2.40	2.45	2.53	2.61	2.50	2.55	2.64	2.72	2.59	2.64	2.73	2.82	2.59	2.64	2.73	2.82	2.59	2.64
	Amps	8.3	8.5	8.7	9.0	8.9	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.3	10.6	11.0	10.7	10.9	11.3	11.6	11.3	11.5	11.9	12.3	11.3	11.5	11.9	12.3	11.3	11.5
	Hi PR	247	266	281	293	277	299	315	329	315	339	358	374	359	387	408	426	404	435	459	479	447	481	508	529	447	481	508	529	447	481
	LO PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	162	173	140	149	162	173	140	149
	MBh	27.6	28.2	30.1	32.2	26.9	27.5	29.4	31.4	26.3	26.8	28.7	30.7	25.6	26.2	28.0	29.9	24.3	24.9	26.6	28.4	22.6	23.0	24.6	26.3	22.6	23.0	24.6	26.3	22.6	23.0
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.91	0.74	0.56	1.01	0.94	0.77	0.57	1.05	0.98	0.80	0.60	1.05	0.99	0.80	0.60	1.05	0.99	0.80	0.60	1.05	0.99
	ΔT	26	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16	24	23	20	16	24	23
	kW	1.95	1.99	2.05	2.12	2.10	2.14	2.21	2.28	2.23	2.28	2.35	2.42	2.34	2.39	2.47	2.55	2.44	2.49	2.57	2.66	2.52	2.58	2.66	2.75	2.52	2.58	2.66	2.75	2.52	2.58
	Amps	8.1	8.3	8.5	8.8	8.7	8.8	9.1	9.4	9.3	9.5	9.8	10.1	9.9	10.1	10.4	10.7	10.4	10.7	11.0	11.3	11.0	11.2	11.6	12.0	11.0	11.2	11.6	12.0	11.0	11.2
	Hi PR	240	258	272	284	269	290	306	319	306	329	348	363	349	375	396	413	392	422	446	465	433	466	492	513	433	466	492	513	433	466
LO PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	136	144	158	168	136	144	
85	MBh	31.3	31.9	33.4	35.6	30.6	31.1	32.6	34.8	29.8	30.4	31.8	34.0	29.1	29.7	31.1	33.1	27.6	28.2	29.5	31.5	25.6	26.1	27.3	29.2	23.7	24.2	26.0	28.0	30.0	32.0
	S/T	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.87	0.65	1.00	1.00	0.87	0.65	1.00	1.00	0.87	0.65	1.00	0.87
	ΔT	25	25	24	21	24	25	24	21	24	24	24	21	23	23	25	21	22	22	23	21	20	21	22	20	20	20	19	15	20	19
	kW	2.03	2.07	2.14	2.21	2.18	2.23	2.30	2.38	2.32	2.37	2.45	2.53	2.44	2.49	2.57	2.66	2.54	2.60	2.68	2.77	2.63	2.69	2.77	2.87	2.63	2.69	2.77	2.87	2.63	2.69
	Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.8	9.7	9.9	10.2	10.5	10.3	10.5	10.8	11.2	10.9	11.1	11.4	11.8	11.5	11.7	12.1	12.5	11.5	11.7	12.1	12.5	11.5	11.7
	Hi PR	252	271	287	299	283	305	322	335	322	346	366	381	367	394	417	434	412	444	469	489	456	490	518	540	456	490	518	540	456	490
	LO PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	176	143	152	166	176	143	152
	MBh	30.4	31.0	32.4	34.6	29.7	30.2	31.7	33.8	29.0	29.5	30.9	33.0	28.3	28.8	30.2	32.2	26.8	27.4	28.7	30.6	24.9	25.3	26.5	28.3	23.7	24.2	26.0	28.0	30.0	32.0
	S/T	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	0.87	0.65	1.00	1.00	0.87	0.65	1.00	0.87
	ΔT	27	26	25	22	26	27	25	22	26	26	25	22	25	26	25	22	24	24	25	22	22	22	23	20	20	20	19	15	20	19
910	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.36	2.30	2.35	2.43	2.50	2.42	2.47	2.55	2.64	2.52	2.58	2.66	2.75	2.61	2.66	2.75	2.84	2.61	2.66	2.75	2.84	2.61	2.66
	Amps	8.3	8.5	8.8	9.0	8.9	9.1	9.4	9.7	9.6	9.8	10.1	10.4	10.2	10.4	10.7	11.1	10.8	11.0	11.4	11.7	11.4	11.6	12.0	12.4	11.4	11.6	12.0	12.4	11.4	11.6
	Hi PR	250	269	284	296	280	301	318	332	319	343	362	378	363	391	412	430	408	439	464	484	451	485	513	535	451	485	513	535	451	485
	LO PR	113	120	131	140	119	127	139	148	124	132	144	153	130	139	151	161	137	145	159	169	141	150	164	175	141	150	164	175	141	150
	MBh	28.0	28.6	29.9	31.9	27.4	27.9	29.2	31.2	26.7	27.2	28.5	30.4	26.1	26.6	27.8	29.7	24.8	25.3	26.4	28.2	22.9	23.4	24.5	26.1	23.7	24.2	26.0	28.0	30.0	32.0
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	23.7	24.2	26.0	28.0	30.0	32.0
	ΔT	27	27	25	22	28	27	26	22	27	27	26	22	26	27	26	22	25	26	26	22	23	24	21	16	20	20	19	15	20	19
	kW	1.97	2.01	2.07	2.14	2.12	2.16	2.23	2.30	2.25	2.29	2.37	2.44	2.36	2.41	2.49	2.57	2.46	2.51	2.59	2.68	2.54	2.60	2.68	2.77	2.54	2.60	2.68	2.77	2.54	2.60
	Amps	8.2	8.3	8.6	8.8	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.2	9.9																	

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	Entering Indoor Wet Bulb Temperature																													
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1050	MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	28.4	28.8	29.9	-	
	S/T	0.65	0.57	0.42	-	0.65	0.57	0.43	-	0.68	0.60	0.45	-	1.00	0.62	0.47	-	1.00	0.64	0.50	-	1.00	0.70	0.55	-	1.00	0.70	0.55	-		
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-		
	kW	2.23	2.23	2.23	-	2.50	2.50	2.50	-	2.80	2.80	2.80	-	3.13	3.12	3.12	-	3.49	3.49	3.48	-	3.91	3.91	3.91	-	3.91	3.91	3.91	-		
	Amps	8.9	8.9	8.9	-	10.1	10.1	10.1	-	11.5	11.5	11.5	-	13.0	13.0	12.9	-	14.6	14.6	14.6	-	16.6	16.6	16.6	-	16.6	16.6	16.6	-		
	HI PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	453	454	-	506	507	509	-	506	507	509	-		
	LO PR	127	129	132	-	135	137	140	-	142	143	147	-	148	149	152	-	153	155	158	-	160	162	165	-	160	162	165	-		
70	1200	MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	28.8	29.3	30.3	-	
	S/T	0.71	0.63	0.48	-	0.72	0.64	0.49	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.71	0.56	-	1.00	1.00	0.62	-	1.00	1.00	0.62	-		
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-		
	kW	2.25	2.25	2.24	-	2.52	2.51	2.51	-	2.82	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.50	3.50	-	3.93	3.93	3.92	-	3.93	3.93	3.92	-		
	Amps	8.9	8.9	8.9	-	10.2	10.2	10.1	-	11.6	11.5	11.5	-	13.0	13.0	13.0	-	14.7	14.7	14.7	-	16.6	16.6	16.6	-	16.6	16.6	16.6	-		
	HI PR	269	270	272	-	311	312	314	-	355	356	358	-	402	404	406	-	454	455	457	-	508	509	511	-	508	509	511	-		
	LO PR	129	131	134	-	137	138	142	-	144	145	148	-	149	151	154	-	155	157	160	-	162	164	167	-	162	164	167	-		
1350	MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	29.4	29.9	30.9	-		
	S/T	0.75	0.67	0.52	-	0.75	0.67	0.53	-	1.00	0.70	0.55	-	1.00	0.72	0.57	-	1.00	0.74	0.60	-	1.00	1.00	0.65	-	1.00	1.00	0.65	-		
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-		
	kW	2.26	2.26	2.25	-	2.53	2.53	2.52	-	2.83	2.83	2.82	-	3.15	3.15	3.15	-	3.51	3.51	3.51	-	3.94	3.94	3.93	-	3.94	3.94	3.93	-		
	Amps	9.0	9.0	9.0	-	10.2	10.2	10.2	-	11.6	11.6	11.6	-	13.1	13.1	13.1	-	14.8	14.7	14.7	-	16.7	16.7	16.7	-	16.7	16.7	16.7	-		
	HI PR	271	272	274	-	313	314	316	-	357	358	360	-	405	406	408	-	456	457	459	-	510	512	513	-	510	512	513	-		
	LO PR	131	133	136	-	139	141	144	-	146	147	151	-	151	153	156	-	157	159	162	-	164	166	169	-	164	166	169	-		

75	1050	MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5
		S/T	0.78	0.70	0.56	0.41	1.00	0.71	0.56	0.41	1.00	0.74	0.59	0.44	1.00	0.76	0.61	0.46	1.00	1.00	0.64	0.48	1.00	1.00	0.69	0.54
		ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16
		kW	2.23	2.23	2.22	2.25	2.50	2.50	2.49	2.51	2.80	2.80	2.79	2.81	3.12	3.12	3.12	3.14	3.49	3.49	3.48	3.50	3.91	3.91	3.91	3.93
		Amps	8.9	8.9	8.8	8.9	10.1	10.1	10.1	10.2	11.5	11.5	11.4	11.5	13.0	13.0	13.0	12.9	13.0	14.6	14.6	14.6	14.7	16.6	16.6	16.5
1200	HI PR	267	268	270	275	309	310	312	317	353	354	356	361	400	402	403	408	452	453	455	459	506	507	509	514	
	LO PR	127	129	132	138	135	137	140	145	142	143	147	152	148	149	152	158	153	155	158	163	160	162	165	170	
	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	
	S/T	0.85	0.77	0.62	0.47	1.00	0.77	0.63	0.48	1.00	0.80	0.66	0.50	1.00	0.82	0.68	0.52	1.00	1.00	0.70	0.55	1.00	1.00	0.75	0.60	
	ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	
1350	kW	2.25	2.24	2.24	2.26	2.51	2.51	2.51	2.53	2.81	2.81	2.81	2.83	3.14	3.14	3.13	3.15	3.50	3.50	3.49	3.52	3.93	3.92	3.92	3.94	
	Amps	8.9	8.9	8.9	9.0	10.2	10.2	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.6	16.6	16.6	16.7	
	HI PR	269	270	272	277	311	312	314	319	355	356	358	363	403	404	406	410	454	455	457	462	509	510	512	516	
	LO PR	129	131	134	139	137	138	142	147	144	145	149	154	149	151	154	160	155	157	160	165	162	164	167	172	
	MBh	35.8	36.3	37.4	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.0	33.5	34.6	36.2	31.1	31.6	32.7	34.2	29.4	29.9	30.9	32.5	
1500	S/T	0.88	0.80	0.66	0.51	1.00	0.81	0.67	0.51	1.00	0.84	0.69	0.54	1.00	0.86	0.71	0.56	1.00	1.00	0.74	0.58	1.00	1.00	0.79	0.64	
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14	
	kW	2.26	2.25	2.25	2.27	2.53	2.52	2.52	2.54	2.83	2.82	2.82	2.84	3.15	3.15	3.14	3.16	3.51	3.51	3.51	3.53	3.94	3.94	3.93	3.95	
	Amps	9.0	9.0	9.0	9.1	10.2	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.1	13.1	13.1	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.7	16.8	
	HI PR	271	272	274	279	313	315	316	321	357	359	360	365	405	406	408	413	456	457	459	464	511	512	514	518	
1600	LO PR	131	133	136	141	139	141	144	149	146	147	151	156	151	153	156	162	157	159	162	167	164	166	169	174	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.<

			65					75					85					95					105					115				
			Entering Indoor Wet Bulb Temperature																													
IDB	Airflow		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1050	MBh	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7		
		S/T	1.00	0.84	0.69	0.54	1.00	0.84	0.70	0.55	1.00	0.87	0.73	0.57	1.00	1.00	0.75	0.59	1.00	1.00	0.77	0.62	1.00	1.00	0.82	0.67	1.00	1.00	0.82	0.67		
		ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	24	20	29	27	24	20		
		kW	2.23	2.23	2.23	2.25	2.50	2.50	2.49	2.52	2.80	2.80	2.79	2.82	3.13	3.12	3.12	3.14	3.49	3.49	3.48	3.50	3.91	3.91	3.91	3.93	3.91	3.91	3.91	3.93		
		Amps	8.9	8.9	8.9	8.9	10.1	10.1	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	12.9	13.0	14.6	14.6	14.6	14.7	16.6	16.6	16.6	16.5	16.6	16.6	16.5	16.6		
		HI PR	267	269	270	275	309	311	312	317	353	355	357	361	401	402	404	409	452	453	455	460	507	508	510	514	507	508	510	514		
80	1200	LO PR	128	129	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	159	164	161	162	166	171	161	162	166	171		
		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1		
		S/T	1.00	0.90	0.76	0.60	1.00	0.91	0.76	0.61	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	1.00	0.74	1.00	1.00	0.83	0.68		
		ΔT	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	21	18	28	26	22	19	28	26	22	19		
		kW	2.25	2.24	2.24	2.26	2.52	2.51	2.51	2.53	2.82	2.81	2.81	2.83	3.14	3.14	3.14	3.15	3.50	3.50	3.50	3.52	3.93	3.93	3.93	3.92	3.93	3.93	3.92	3.94		
		Amps	8.9	8.9	8.9	9.0	10.2	10.2	10.1	10.2	11.6	11.5	11.5	11.6	13.0	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.6	16.6	16.6	16.6	16.7	16.6	16.6	16.6		
	1350	HI PR	270	271	273	277	312	313	315	319	356	357	359	363	403	404	406	411	454	456	457	462	509	510	512	517	509	510	512	517		
		LO PR	130	131	135	140	137	139	142	148	144	146	149	154	150	152	155	160	156	157	160	166	163	164	167	173	163	164	167	173		
		MBh	36.0	36.5	37.5	39.1	35.7	36.2	37.2	38.8	34.8	35.3	36.3	37.9	33.2	33.7	34.7	36.3	31.3	31.8	32.8	34.4	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7		
		S/T	1.00	0.94	0.79	0.64	1.00	0.94	0.80	0.65	1.00	1.00	0.83	0.67	1.00	1.00	0.85	0.69	1.00	1.00	0.87	0.72	1.00	1.00	1.00	0.77	1.00	1.00	0.87	0.72		
		ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	22	18	27	25	22	18		
		kW	2.26	2.26	2.25	2.27	2.53	2.53	2.52	2.54	2.83	2.83	2.82	2.84	3.15	3.15	3.15	3.17	3.51	3.51	3.51	3.53	3.94	3.94	3.93	3.95	3.94	3.94	3.93	3.95		
	1350	Amps	9.0	9.0	9.0	9.1	10.2	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.1	13.1	13.1	13.2	14.7	14.7	14.7	14.8	16.7	16.7	16.7	16.8	16.7	16.7	16.7	16.8		
		HI PR	272	273	275	279	314	315	317	322	358	359	361	366	405	407	408	413	457	458	460	464	511	512	514	519	511	512	514	519		
		LO PR	132	133	137	142	140	141	144	150	146	148	151	157	152	154	157	162	158	159	162	168	165	166	170	175	165	166	170	175		

85	1050	MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.8	33.3	34.3	35.9	30.9	31.4	32.4	34.0	29.1	29.6	30.7	32.3	
		S/T	1.00	0.94	0.80	0.65	1.00	1.00	0.81	0.65	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	1.00	0.73	1.00	1.00	1.00	0.78	
		ΔT	32	30	26	23	32	30	26	23	32	30	27	23	32	30	26	23	31	29	26	22	32	31	27	24	
		kW	2.24	2.24	2.23	2.25	2.51	2.50	2.50	2.52	2.81	2.80	2.80	2.82	3.13	3.13	3.12	3.15	3.49	3.49	3.49	3.51	3.92	3.92	3.91	3.93	
		Amps	8.9	8.9	8.9	9.0	10.1	10.1	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	13.0	13.1	14.7	14.6	14.6	14.7	16.6	16.6	16.6	16.7	
	HI PR	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	455	456	461	508	509	511	516		
	LO PR	130	131	135	140	138	139	142	148	144	146	149	155	150	152	155	160	156	157	160	166	163	164	168	173		
	1200	MBh	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7	
		S/T	1.00	1.00	0.86	0.71	1.00	1.00	0.87	0.72	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.79	1.00	1.00	1.00	0.84	
		ΔT	30	29	25	22	30	29	25	22	31	29	25	22	30	29	25	22	30	28	25	21	31	29	26	22	
kW		2.25	2.25	2.25	2.27	2.52	2.52	2.51	2.53	2.82	2.82	2.81	2.83	3.15	3.14	3.14	3.16	3.51	3.51	3.50	3.52	3.93	3.93	3.93	3.95		
Amps		9.0	9.0	8.9	9.0	10.2	10.2	10.2	10.3	11.6	11.6	11.5	11.6	13.1	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.6	16.7		
1350	HI PR	271	272	274	279	313	314	316	321	357	358	360	365	404	406	408	412	456	457	459	463	510	511	513	518		
	LO PR	132	133	136	142	139	141	144	150	146	148	151	156	152	153	157	162	158	159	162	168	165	166	169	175		
	MBh	36.6	37.1	38.1	39.7	36.3	36.8	37.8	39.4	35.4	35.9	36.9	38.5	33.8	34.3	35.3	36.9	31.9	32.4	33.4	35.0	30.1	30.6	31.7	33.3		
	S/T	1.00	1.00	0.90	0.75	1.00	1.00	0.91	0.75	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.88		
	ΔT	30	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	29	25	22		
	kW	2.26	2.26	2.26	2.28	2.53	2.53	2.53	2.55	2.83	2.83	2.83	2.85	3.16	3.15	3.15	3.17	3.52	3.52	3.51	3.53	3.95	3.94	3.94	3.96		
	Amps	9.0	9.0	9.0	9.1	10.3	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.1	13.1	13.1	13.2	14.8	14.8	14.7	14.8	16.7	16.7	16.7	16.8		
	HI PR	273	274	276	281	315	316	318	323	359	360	362	367	407	408	410	414	458	459	461	466	512	514	515	520		
	LO PR	134	135	139	144	141	143	146	152	148	150	153	158	154	156	159	164	160	161	164	170	167	168	171	177		
	kW = Total system power																										
DB: Entering Indoor Dry Bulb Temperature																											
Shaded area reflects AHRI (TVA) conditions.																											
Amperes: Unit amperes (compressor + condenser fan motors)																											
High and low pressures are measured at the liquid and suction access fittings.																											

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
IDB	Airflow	Entering Indoor Wet Bulb Temperature																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	41.2	41.8	43.0	-	40.9	41.4	42.7	-	39.8	40.4	41.6	-	38.0	38.5	39.8	-	35.7	36.3	37.5	-	33.7	34.3	35.5	-	33.7	34.3	35.5	-	33.7	34.3	35.5	-				
	S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-				
	ΔT	19	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-				
	kW	2.61	2.61	2.60	-	2.93	2.93	2.92	-	3.29	3.29	3.28	-	3.67	3.67	3.67	-	4.10	4.10	4.10	-	4.61	4.61	4.60	-	4.61	4.61	4.60	-	4.61	4.61	4.60	-				
	Amps	10.3	10.3	10.2	-	11.7	11.7	11.7	-	13.4	13.3	13.3	-	15.1	15.1	15.1	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-	19.4	19.4	19.4	-	19.4	19.4	19.4	-				
	HI PR	274	275	277	-	317	318	320	-	362	363	365	-	410	411	413	-	462	463	465	-	518	519	521	-	518	519	521	-	518	519	521	-				
	LO PR	126	128	131	-	134	135	139	-	141	142	145	-	146	148	151	-	152	153	156	-	159	160	163	-	159	160	163	-	159	160	163	-				
1400	MBh	41.6	42.2	43.4	-	41.2	41.8	43.0	-	40.2	40.8	42.0	-	38.4	38.9	40.1	-	36.1	36.7	37.9	-	34.1	34.7	35.9	-	34.1	34.7	35.9	-	34.1	34.7	35.9	-				
	S/T	0.71	0.63	0.49	-	0.72	0.64	0.50	-	0.75	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	1.00	0.76	0.62	-	1.00	0.76	0.62	-				
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-				
	kW	2.62	2.62	2.61	-	2.94	2.94	2.93	-	3.30	3.29	3.29	-	3.68	3.68	3.67	-	4.11	4.11	4.11	-	4.62	4.62	4.61	-	4.62	4.62	4.61	-	4.62	4.62	4.61	-				
	Amps	10.3	10.3	10.3	-	11.8	11.8	11.7	-	13.4	13.4	13.4	-	15.2	15.2	15.1	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-	19.4	19.4	19.4	-	19.4	19.4	19.4	-				
	HI PR	275	277	278	-	318	319	321	-	363	364	366	-	411	413	415	-	464	465	467	-	519	520	522	-	519	520	522	-	519	520	522	-				
	LO PR	128	129	132	-	135	137	140	-	142	143	147	-	147	149	152	-	153	154	158	-	160	161	165	-	160	161	165	-	160	161	165	-				
1575	MBh	42.4	43.0	44.2	-	42.0	42.6	43.8	-	41.0	41.5	42.8	-	39.1	39.7	40.9	-	36.9	37.5	38.7	-	34.9	35.4	36.7	-	34.9	35.4	36.7	-	34.9	35.4	36.7	-				
	S/T	0.73	0.66	0.52	-	0.74	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-				
	ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-				
	kW	2.64	2.63	2.63	-	2.95	2.95	2.95	-	3.31	3.31	3.30	-	3.70	3.69	3.69	-	4.13	4.12	4.12	-	4.63	4.63	4.62	-	4.63	4.63	4.62	-	4.63	4.63	4.62	-				
	Amps	10.4	10.4	10.3	-	11.8	11.8	11.8	-	13.5	13.4	13.4	-	15.2	15.2	15.2	-	17.2	17.2	17.2	-	19.5	19.5	19.5	-	19.5	19.5	19.5	-	19.5	19.5	19.5	-				
	HI PR	278	279	281	-	321	322	324	-	366	367	369	-	414	415	417	-	466	467	469	-	522	523	525	-	522	523	525	-	522	523	525	-				
	LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	151	155	-	155	157	160	-	162	164	167	-	162	164	167	-	162	164	167	-				

75	1300	MBh	41.3	41.8	43.0	44.9	40.9	41.5	42.7	44.5	39.8	40.4	41.6	43.5	38.0	38.6	39.8	41.6	35.8	36.3	37.6	39.4	33.7	34.3	35.5	37.4
		S/T	0.82	0.74	0.60	0.46	1.00	0.75	0.61	0.46	1.00	0.80	0.66	0.51	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.58
		ΔT	24	22	18	14	24	22	18	14	24	22	18	15	24	22	18	14	23	21	18	14	24	23	19	15
		kW	2.61	2.61	2.60	2.63	2.93	2.93	2.92	2.95	3.29	3.28	3.28	3.30	3.67	3.67	3.66	3.69	4.10	4.10	4.09	4.12	4.61	4.61	4.60	4.62
		Amps	10.3	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.3	13.3	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.0	17.2	19.4	19.4	19.4	19.5
		HI PR	274	275	277	282	317	318	320	325	362	363	365	370	410	411	413	418	462	464	466	470	518	519	521	526
LO PR	126	128	131	136	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	169		
75	1400	MBh	41.6	42.2	43.4	45.3	41.3	41.8	43.1	44.9	40.2	40.8	42.0	43.9	38.4	39.0	40.2	42.0	36.1	36.7	37.9	39.8	34.1	34.7	35.9	37.8
		S/T	0.85	0.77	0.63	0.48	1.00	0.77	0.63	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.56	1.00	1.00	0.76	0.61
		ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	24	22	18	15
		kW	2.62	2.62	2.61	2.64	2.94	2.94	2.93	2.95	3.29	3.29	3.29	3.31	3.68	3.68	3.67	3.70	4.11	4.11	4.10	4.13	4.62	4.61	4.61	4.63
		Amps	10.3	10.3	10.3	10.4	11.8	11.7	11.7	11.8	13.4	13.4	13.4	13.5	15.2	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5
		HI PR	276	277	279	283	318	320	322	326	363	365	366	371	412	413	415	420	464	465	467	472	519	521	523	527
LO PR	128	129	132	138	135	137	140	145	142	143	147	152	147	149	152	157	153	154	158	163	160	161	165	170		
1575		MBh	42.4	43.0	44.2	46.1	42.1	42.6	43.8	45.7	41.0	41.6	42.8	44.6	39.2	39.7	40.9	42.8	36.9	37.5	38.7	40.6	34.9	35.5	36.7	38.5
		S/T	0.87	0.79	0.65	0.50	1.00	0.80	0.65	0.51	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.58	1.00	1.00	0.78	0.63
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14
		kW	2.63	2.63	2.63	2.65	2.95	2.95	2.94	2.97	3.31	3.31	3.30	3.32	3.69	3.69	3.69	3.71	4.12	4.12	4.12	4.14	4.63	4.63	4.62	4.65
		Amps	10.4	10.3	10.3	10.4	11.8	11.8	11.8	11.9	13.5	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.2	19.5	19.5	19.5	19.6
		HI PR	278	279	281	286	321	322	324	329	366	367	369	374	414	415	417	422	466	467	469	474	522	523	525	530
LO PR	130	132	135	140	138	139	142	148	144	146	149	154	150	151	155	160	155	157	160	165	162	164	167	172		

		Outdoor Ambient Temperature																																
		65					75					85					95					105					115							
IDB	Airflow	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75			
80	1300	MBh	41.5	42.0	43.3	45.1	41.1	41.7	42.9	44.7	40.0	40.6	41.8	43.7	38.2	38.8	40.0	41.9	36.0	36.5	37.8	39.6	36.0	36.5	37.8	39.6	36.0	36.5	37.8	39.6	36.0	36.5	37.8	39.6
		S/T	1.00	0.87	0.73	0.58	1.00	0.88	0.74	0.59	1.00	0.91	0.76	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.81	0.66	1.00	1.00	0.81	0.66	1.00	1.00	0.81	0.66
		ΔT	28	26	22	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20	29	27	23	20	29	27	23	20
		kW	2.61	2.61	2.60	2.63	2.93	2.93	2.92	2.95	3.29	3.29	3.28	3.30	3.67	3.67	3.67	3.69	4.10	4.10	4.10	4.12	4.61	4.61	4.61	4.63	4.61	4.61	4.61	4.61	4.61	4.63	4.63	
		Amps	10.3	10.3	10.2	10.3	11.7	11.7	11.7	11.8	13.4	13.3	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.4	19.4	19.5	19.5	
		HI PR	275	276	278	283	318	319	321	325	362	364	366	370	411	412	414	419	463	464	466	471	519	520	522	526	519	520	522	526	519	520	522	526
	LO PR	127	128	132	137	135	136	139	145	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169	159	161	164	169	159	161	164	169	
	1400	MBh	41.8	42.4	43.6	45.5	41.5	42.1	43.3	45.1	40.4	41.0	42.2	44.1	38.6	39.2	40.4	42.2	36.4	36.9	38.1	40.0	34.3	34.9	36.1	38.0	34.3	34.9	36.1	38.0	34.3	34.9	36.1	38.0
		S/T	1.00	0.90	0.76	0.61	1.00	0.90	0.76	0.62	1.00	0.93	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.83	0.68	1.00	1.00	0.83	0.68	1.00	1.00	0.83	0.68
		ΔT	27	25	22	18	27	25	22	18	27	26	22	18	27	25	22	18	27	25	21	18	28	26	23	19	28	26	23	19	28	26	23	19
kW		2.62	2.62	2.61	2.64	2.94	2.94	2.93	2.96	3.30	3.29	3.29	3.31	3.68	3.68	3.67	3.70	4.11	4.11	4.10	4.13	4.62	4.62	4.62	4.63	4.62	4.62	4.62	4.62	4.62	4.63	4.63		
Amps		10.3	10.3	10.3	10.4	11.8	11.8	11.7	11.8	13.4	13.4	13.4	13.5	15.2	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.4	19.4	19.5	19.5		
HI PR		276	277	279	284	319	320	322	327	364	365	367	372	412	413	415	420	464	466	467	472	520	521	523	528	520	521	523	528	520	521	523	528	
1575	LO PR	128	130	133	138	136	137	140	146	142	144	147	152	148	150	153	158	154	155	158	164	160	162	165	170	160	162	165	170	160	162	165	170	
	MBh	42.6	43.2	44.4	46.3	42.3	42.8	44.1	45.9	41.2	41.8	43.0	44.8	39.4	39.9	41.2	43.0	37.1	37.7	38.9	40.8	35.1	35.7	36.9	38.7	35.1	35.7	36.9	38.7	35.1	35.7	36.9	38.7	
	S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	
	ΔT	26	24	21	17	26	24	21	17	26	25	21	17	26	24	21	17	26	24	20	17	27	25	22	18	27	25	22	18	27	25	22	18	
	kW	2.63	2.63	2.63	2.65	2.95	2.95	2.95	2.97	3.31	3.31	3.30	3.33	3.70	3.69	3.69	3.71	4.13	4.12	4.12	4.14	4.63	4.63	4.63	4.65	4.63	4.63	4.63	4.63	4.63	4.65	4.65		
	Amps	10.4	10.4	10.3	10.4	11.8	11.8	11.8	11.9	13.5	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.3	19.5	19.5	19.5	19.6	19.5	19.5	19.5	19.5	19.5	19.5	19.6		
85	1300	HI PR	279	280	282	286	321	323	324	329	366	367	369	374	415	416	418	422	467	468	470	475	522	524	525	530	522	524	525	530	522	524	525	530
		LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173	163	164	167	173	163	164	167	173
		MBh	42.2	42.7	43.9	45.8	41.8	42.4	43.6	45.4	40.7	41.3	42.5	44.4	38.9	39.5	40.7	42.5	36.7	37.2	38.5	40.3	34.6	35.2	36.4	38.3	34.6	35.2	36.4	38.3	34.6	35.2	36.4	38.3
		S/T	1.00	0.98	0.84	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.76	0.61	1.00	1.00	0.82	0.67	1.00	1.00	0.76	0.61	1.00	1.00	0.82	0.67
		ΔT	32	30	26	22	32	30	26	22	32	30	26	23	31	30	26	22	31	29	26	22	32	31	27	23	32	31	27	23	32	31	27	23
		kW	2.62	2.62	2.61	2.63	2.94	2.93	2.93	2.95	3.29	3.29	3.29	3.31	3.68	3.68	3.67	3.70	4.11	4.11	4.10	4.13	4.62	4.61	4.61	4.63	4.62	4.61	4.61	4.61	4.61	4.63	4.63	
	1400	Amps	10.3	10.3	10.3	10.4	11.8	11.7	11.7	11.8	13.4	13.4	13.3	13.5	15.1	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.4	19.4	19.5	19.5	
		HI PR	276	277	279	284	319	320	322	327	364	365	367	372	412	413	415	420	464	465	467	472	520	521	523	528	520	521	523	528	520	521	523	528
		LO PR	129	130	134	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	161	163	166	171	161	163	166	171
		MBh	42.5	43.1	44.3	46.2	42.2	42.7	44.0	45.8	41.1	41.7	42.9	44.8	39.3	39.9	41.1	42.9	37.0	37.6	38.8	40.7	35.0	35.6	36.8	38.6	35.0	35.6	36.8	38.6	35.0	35.6	36.8	38.6
S/T		1.00	1.00	0.86	0.71	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.75	1.00	1.00	0.91	0.77	1.00	1.00	0.79	0.64	1.00	1.00	0.84	0.69	1.00	1.00	0.79	0.64	1.00	1.00	0.84	0.69	
ΔT		31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	31	29	25	21	32	30	26	23	32	30	26	23	32	30	26	23	
1575	kW	2.63	2.62	2.62	2.64	2.95	2.94	2.94	2.96	3.30	3.30	3.29	3.32	3.69	3.69	3.68	3.70	4.12	4.12	4.11	4.14	4.62	4.62	4.62	4.64	4.62	4.62	4.62	4.62	4.62	4.64	4.64		
	Amps	10.3	10.3	10.3	10.4	11.8	11.8	11.8	11.9	13.4	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.1	17.1	17.2	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.6	
	HI PR	277	279	280	285	320	321	323	328	365	366	368	373	413	415	417	421	466	467	469	473	521	522	524	529	521	522	524	529	521	522	524	529	
	LO PR	130	132	135	140	138	139	142	148	144	146	149	154	150	151	155	160	155	157	160	165	162	164	167	172	162	164	167	172	162	164	167	172	
	MBh	43.3	43.9	45.1	47.0	42.9	43.5	44.7	46.6	41.9	42.5	43.7	45.5	40.1	40.6	41.8	43.7	37.8	38.4	39.6	41.5	35.8	36.4	37.6	39.4	35.8	36.4	37.6	39.4	35.8	36.4	37.6	39.4	
	S/T	1.00	1.00	0.88	0.74	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	0.94																		

IDB		Airflow		Outdoor Ambient Temperature																115															
				65				75				85				95				105				115											
				Entering Indoor Wet Bulb Temperature																															
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
1400	MBh	47.5	48.2	49.6	-	47.1	47.8	49.2	-	45.9	46.5	47.9	-	43.7	44.4	45.8	-	41.1	41.8	43.2	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-						
	S/T	0.66	0.58	0.44	-	0.66	0.58	0.44	-	0.69	0.61	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.71	0.56	-	1.00	0.71	0.56	-						
	ΔT	20	18	14	-	20	18	14	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-	21	19	15	-						
	kW	3.05	3.04	3.04	-	3.41	3.41	3.40	-	3.82	3.81	3.81	-	4.26	4.25	4.25	-	4.75	4.75	4.74	-	5.33	5.32	5.32	-	5.33	5.32	5.32	-						
	Amps	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.2	15.2	15.2	-	17.2	17.2	17.2	-	19.5	19.4	19.4	-	22.1	22.1	22.1	-	22.1	22.1	22.1	-						
	Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	402	403	-	452	453	455	-	506	507	509	-	506	507	509	-						
	Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	147	150	-	150	152	155	-	157	159	162	-	157	159	162	-						
1525	MBh	47.9	48.6	50.0	-	47.5	48.2	49.6	-	46.3	46.9	48.4	-	44.1	44.8	46.2	-	41.5	42.2	43.6	-	39.2	39.8	41.3	-	39.2	39.8	41.3	-						
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-						
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-						
	kW	3.06	3.06	3.05	-	3.42	3.42	3.41	-	3.83	3.83	3.82	-	4.27	4.27	4.26	-	4.76	4.76	4.75	-	5.34	5.34	5.33	-	5.34	5.34	5.33	-						
	Amps	11.7	11.7	11.7	-	13.4	13.4	13.3	-	15.3	15.2	15.2	-	17.3	17.3	17.2	-	19.5	19.5	19.5	-	22.2	22.1	22.1	-	22.2	22.1	22.1	-						
	Hi PR	268	270	272	-	310	312	314	-	355	356	358	-	402	403	405	-	453	454	456	-	508	509	511	-	508	509	511	-						
	Lo PR	126	128	131	-	134	135	139	-	141	142	145	-	146	148	151	-	152	153	156	-	159	160	163	-	159	160	163	-						
1800	MBh	49.1	49.7	51.1	-	48.6	49.3	50.7	-	47.4	48.1	49.5	-	45.3	45.9	47.4	-	42.7	43.3	44.8	-	40.3	41.0	42.4	-	40.3	41.0	42.4	-						
	S/T	0.74	0.66	0.52	-	0.74	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.73	0.59	-	1.00	0.79	0.65	-	1.00	0.79	0.65	-						
	ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-						
	kW	3.08	3.08	3.07	-	3.44	3.44	3.44	-	3.85	3.85	3.84	-	4.29	4.29	4.28	-	4.78	4.78	4.77	-	5.36	5.36	5.35	-	5.36	5.36	5.35	-						
	Amps	11.8	11.8	11.8	-	13.5	13.5	13.4	-	15.4	15.3	15.3	-	17.4	17.4	17.3	-	19.6	19.6	19.6	-	22.3	22.2	22.2	-	22.3	22.2	22.2	-						
	Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	405	406	408	-	456	457	459	-	511	512	514	-	511	512	514	-						
	Lo PR	129	131	134	-	137	139	142	-	144	145	148	-	149	151	154	-	155	156	159	-	162	163	166	-	162	163	166	-						
1400	MBh	47.5	48.2	49.6	51.8	47.1	47.8	49.2	51.4	45.9	46.5	48.0	50.1	43.8	44.4	45.8	48.0	41.2	41.8	43.2	45.4	38.8	39.5	40.9	43.0	38.8	39.5	40.9	43.0						
	S/T	0.79	0.71	0.57	0.42	0.80	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	0.79	0.65	0.50	1.00	1.00	0.70	0.55	1.00	1.00	0.70	0.55						
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16	25	23	19	16						
	kW	3.04	3.04	3.03	3.06	3.41	3.41	3.40	3.43	3.82	3.81	3.81	3.83	4.26	4.25	4.25	4.27	4.75	4.74	4.74	4.77	5.32	5.32	5.32	5.34	5.32	5.32	5.32	5.34						
	Amps	11.7	11.6	11.6	11.7	13.3	13.3	13.3	13.4	15.2	15.2	15.1	15.3	17.2	17.2	17.2	17.3	19.4	19.4	19.4	19.5	22.1	22.1	22.0	22.2	22.1	22.1	22.0	22.2						
	Hi PR	267	268	270	275	309	310	312	317	353	354	356	361	401	402	404	408	452	453	455	459	506	507	509	514	506	507	509	514						
	Lo PR	125	127	130	135	133	134	137	143	139	141	144	149	145	147	150	155	151	152	155	161	157	159	162	167	157	159	162	167						
1525	MBh	48.0	48.6	50.0	52.2	47.5	48.2	49.6	51.8	46.3	47.0	48.4	50.5	44.2	44.8	46.3	48.4	41.6	42.2	43.7	45.8	39.2	39.9	41.3	43.4	39.2	39.9	41.3	43.4						
	S/T	0.83	0.75	0.61	0.46	1.00	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59						
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15						
	kW	3.06	3.05	3.05	3.07	3.42	3.42	3.41	3.44	3.83	3.82	3.82	3.85	4.27	4.26	4.26	4.29	4.76	4.76	4.75	4.78	5.34	5.33	5.33	5.35	5.34	5.33	5.33	5.35						
	Amps	11.7	11.7	11.7	11.8	13.4	13.4	13.3	13.5	15.2	15.2	15.2	15.3	17.3	17.2	17.2	17.3	19.5	19.5	19.5	19.6	22.1	22.1	22.1	22.2	22.1	22.1	22.1	22.2						
	Hi PR	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	454	456	461	508	509	511	515	508	509	511	515						
	Lo PR	126	128	131	136	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	169	159	160	163	169						
1800	MBh	49.1	49.7	51.2	53.3	48.7	49.3	50.7	52.9	47.4	48.1	49.5	51.7	45.3	46.0	47.4	49.5	42.7	43.4	44.8	46.9	40.3	41.0	42.4	44.6	40.3	41.0	42.4	44.6						
	S/T	0.87	0.79	0.65	0.50	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.73	0.58	1.00	1.00	0.78	0.63	1.00	1.00	0.78	0.63						
	ΔT	22	20	17	13	22	20	16	13	22	20	17	13	22	20	16	13	22	20	16	13	23	21	17	14	23	21	17	14						
	kW	3.08	3.08	3.07	3.10	3.44	3.44	3.43	3.46	3.85	3.85	3.84	3.87	4.29	4.29	4.28	4.31	4.78	4.78	4.77	4.80	5.36	5.36	5.35	5.38	5.36	5.36	5.35	5.38						
	Amps	11.8	11.8	11.8	11.9	13.5	13.5	13.4	13.6	15.3	15.3	15.3	15.4	17.4	17.3	17.3	17.4	19.6	19.6	19.6	19.7	22.2	22.2	22.2	22.3	22.2	22.2	22.2	22.3						
	Hi PR	272	273	275	280	314	315	317	322	358	359	361	366	405	406	408	413	456	458	459	464	511	512	514	519	511	512	512	514	519					
	Lo PR	129	131	134	139	137	139	142	147	144	145	148	154	149	151	154	159	155	156	159	165	162	163	166	172	162	163	166	172						
DB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions.																kW = Total system power																	
		High and low pressures are measured at the liquid and suction access fittings.																Amps: Unit amps (comp.+ evaporator + condenser fan motors)																	

		Outdoor Ambient Temperature												115																							
		65						75						85						95						105						115					
IDB	Airflow	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171							
		Entering Indoor Wet Bulb Temperature																																			
80	1400	MBh	47.8	48.5	49.9	52.0	54.1	56.2	58.3	60.4	62.5	64.6	66.7	68.8	70.9	73.0	75.1	77.2	79.3	81.4	83.5	85.6	87.7	89.8	91.9	94.0	96.1	98.2	100.3	102.4							
	S/T	1.00	0.84	0.70	0.55	0.40	0.26	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
	ΔT	28	26	23	19	15	12	9	6	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
	kW	3.05	3.04	3.04	3.06	3.41	3.41	3.40	3.43	3.82	3.81	3.81	3.84	4.26	4.25	4.25	4.28	4.75	4.75	4.74	4.77	5.33	5.32	5.32	5.34	5.91	5.89	5.87	5.84	5.81							
	Amps	11.7	11.7	11.6	11.8	13.3	13.3	13.3	13.4	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.3	19.5	19.4	19.4	19.5	22.1	22.1	22.1	22.2	25.7	25.6	25.5	25.4	25.3							
	Hi PR	268	269	271	275	310	311	313	317	354	355	357	361	401	402	404	409	452	453	455	460	507	508	510	514	581	579	577	574	571							
	Lo PR	126	127	130	136	133	135	138	143	140	141	145	150	146	147	150	156	151	153	156	161	158	160	163	168	193	191	189	186	183							
	1525	MBh	48.2	48.9	50.3	52.4	54.5	56.6	58.7	60.8	62.9	65.0	67.1	69.2	71.3	73.4	75.5	77.6	79.7	81.8	83.9	86.0	88.1	90.2	92.3	94.4	96.5	98.6	100.7	102.8	104.9						
	S/T	1.00	0.88	0.74	0.59	0.44	0.30	0.16	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
	ΔT	27	25	22	18	14	11	8	5	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
kW	3.06	3.06	3.05	3.08	3.42	3.42	3.41	3.44	3.83	3.83	3.82	3.85	4.27	4.27	4.26	4.29	4.76	4.76	4.75	4.78	5.34	5.34	5.33	5.36	5.93	5.91	5.89	5.86	5.83								
Amps	11.7	11.7	11.7	11.8	13.4	13.4	13.3	13.5	15.2	15.2	15.2	15.3	17.3	17.2	17.2	17.3	19.5	19.5	19.5	19.6	22.2	22.1	22.1	22.2	25.8	25.7	25.6	25.5	25.4								
Hi PR	269	270	272	277	311	312	314	319	355	356	358	363	403	404	406	410	454	455	457	461	508	509	511	516	583	581	579	576	573								
Lo PR	127	128	132	137	135	136	139	145	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169	195	193	191	188	185								
1800	MBh	49.3	50.0	51.4	53.6	55.8	58.0	60.2	62.4	64.6	66.8	69.0	71.2	73.4	75.6	77.8	80.0	82.2	84.4	86.6	88.8	91.0	93.2	95.4	97.6	99.8	102.0	104.2	106.4	108.6							
S/T	1.00	0.92	0.78	0.63	0.48	0.33	0.18	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
ΔT	26	24	21	17	13	10	7	4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
kW	3.08	3.08	3.07	3.10	3.44	3.44	3.44	3.46	3.85	3.85	3.84	3.87	4.29	4.29	4.28	4.31	4.78	4.78	4.77	4.80	5.36	5.36	5.35	5.38	5.95	5.93	5.91	5.88	5.85								
Amps	11.8	11.8	11.8	11.9	13.5	13.5	13.4	13.6	15.3	15.3	15.3	15.4	17.4	17.4	17.3	17.5	19.6	19.6	19.6	19.7	22.3	22.2	22.2	22.3	25.9	25.8	25.7	25.6	25.5								
Hi PR	272	274	275	280	314	316	317	322	358	360	361	366	406	407	409	413	457	458	460	465	511	513	514	519	585	583	581	578	575								
Lo PR	130	132	135	140	138	139	142	148	144	146	149	154	150	151	155	160	155	157	160	165	162	164	167	172	197	195	193	190	187								
85	1400	MBh	48.6	49.2	50.7	52.8	54.9	57.0	59.1	61.2	63.3	65.4	67.5	69.6	71.7	73.8	75.9	78.0	80.1	82.2	84.3	86.4	88.5	90.6	92.7	94.8	96.9	99.0	101.1	103.2	105.3						
	S/T	1.00	0.95	0.81	0.66	0.51	0.36	0.21	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
	ΔT	32	30	26	23	19	15	12	9	6	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
	kW	3.05	3.05	3.04	3.07	3.42	3.41	3.41	3.44	3.82	3.82	3.82	3.84	4.26	4.26	4.26	4.28	4.76	4.75	4.75	4.77	5.33	5.33	5.32	5.35	5.92	5.90	5.88	5.85	5.82							
	Amps	11.7	11.7	11.7	11.8	13.4	13.4	13.3	13.4	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.3	19.5	19.5	19.4	19.6	22.1	22.1	22.1	22.2	25.7	25.6	25.5	25.4	25.3							
	Hi PR	269	270	272	277	311	312	314	319	355	356	358	363	404	404	405	410	453	455	457	461	508	509	511	516	581	579	577	574	571							
	Lo PR	128	129	132	138	135	137	140	145	142	143	147	152	147	149	152	157	153	154	158	163	160	161	165	170	195	193	191	188	185							
	1525	MBh	49.0	49.7	51.1	53.2	55.3	57.4	59.5	61.6	63.7	65.8	67.9	70.0	72.1	74.2	76.3	78.4	80.5	82.6	84.7	86.8	88.9	91.0	93.1	95.2	97.3	99.4	101.5	103.6	105.7						
	S/T	1.00	0.98	0.84	0.69	0.54	0.39	0.24	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
	ΔT	31	29	26	22	18	14	11	8	5	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
kW	3.06	3.06	3.06	3.08	3.43	3.43	3.42	3.45	3.84	3.83	3.83	3.85	4.28	4.27	4.27	4.29	4.77	4.77	4.76	4.79	5.35	5.34	5.34	5.36	5.93	5.91	5.89	5.86	5.83								
Amps	11.8	11.7	11.7	11.8	13.4	13.4	13.4	13.5	15.3	15.3	15.2	15.4	17.3	17.3	17.3	17.4	19.5	19.5	19.5	19.6	22.2	22.2	22.1	22.3	25.8	25.7	25.6	25.5	25.4								
Hi PR	270	272	273	278	312	314	315	320	356	358	360	364	404	405	407	412	455	456	458	463	509	511	513	517	583	581	579	576	573								
Lo PR	129	130	134	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	196	194	192	189	186								
1800	MBh	50.1	50.8	52.2	54.4	56.5	58.6	60.7	62.8	64.9	67.0	69.1	71.2	73.3	75.4	77.5	79.6	81.7	83.8	85.9	88.0	90.1	92.2	94.3	96.4	98.5	100.6	102.7	104.8	106.9							
S/T	1.00	1.00	0.89	0.74	0.59	0.44	0.29	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
ΔT	30	28	24	21	17	13	10	7	4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
kW	3.09	3.08	3.08	3.11	3.45	3.45	3.44	3.47	3.86	3.86	3.85	3.88	4.30	4.30	4.29	4.32	4.79	4.79	4.78	4.81	5.37	5.36	5.36	5.39	5.96	5.94	5.92	5.89	5.86								
Amps	11.9	11.8	11.8	11.9	13.5	13.5	13.5	13.6	15.4	15.4	15.3	15.5	17.4	17.4	17.4	17.5	19.6	19.6	19.6	19.7	22.3	22.3	22.2	22.4	25.9	25.8	25.7	25.6	25.5								
Hi PR	274	275	277	281	316	317	319	323	360	361	363	367	407	408	410	415	458	459	461	466	513	514	516	520	585	583	581	578	575								
Lo PR	132	133																																			

		Outdoor Ambient Temperature										115																			
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	975	MBh	41.0	41.6	42.8	-	40.6	41.2	42.4	-	39.6	40.2	41.4	-	37.7	38.3	39.5	-	35.5	36.1	37.3	-	33.4	34.0	35.2	-	33.4	34.0	35.2	-	
		S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	
		ΔT	20	19	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-	
		kW	2.31	2.31	2.30	-	2.58	2.58	2.58	-	2.89	2.89	2.88	-	3.22	3.22	3.21	-	3.59	3.59	3.58	-	4.03	4.02	4.02	-	4.03	4.02	4.02	-	
		Amps	8.2	8.2	8.1	-	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.1	12.1	12.1	-	13.7	13.7	13.7	-	15.6	15.6	15.6	-	15.6	15.6	15.6	-	
	1100	Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	452	454	-	506	507	509	-	506	507	509	-	
		Lo PR	125	126	130	-	132	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	159	162	-	157	159	162	-	
		MBh	41.5	42.1	43.3	-	41.1	41.7	42.9	-	40.1	40.6	41.9	-	38.2	38.8	40.0	-	36.0	36.6	37.8	-	33.9	34.5	35.7	-	33.9	34.5	35.7	-	
		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-	
		ΔT	19	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	
1325	kW	2.32	2.32	2.31	-	2.60	2.59	2.59	-	2.90	2.90	2.90	-	3.23	3.23	3.23	-	3.60	3.60	3.60	-	4.04	4.04	4.03	-	4.04	4.04	4.03	-		
	Amps	8.2	8.2	8.2	-	9.4	9.4	9.4	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.7	15.7	15.7	-	15.7	15.7	15.7	-		
	Hi PR	269	270	272	-	311	312	314	-	355	356	358	-	402	403	405	-	453	454	456	-	508	509	511	-	508	509	511	-		
	Lo PR	126	128	131	-	134	136	139	-	141	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-		
	MBh	42.6	43.2	44.4	-	42.3	42.8	44.1	-	41.2	41.8	43.0	-	39.3	39.9	41.2	-	37.1	37.7	38.9	-	35.0	35.6	36.8	-	35.0	35.6	36.8	-		
75	975	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	
		kW	2.34	2.34	2.33	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-	3.25	3.25	3.25	-	3.62	3.62	3.62	-	4.06	4.06	4.05	-	4.06	4.06	4.05	-	
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.8	10.8	10.8	-	12.3	12.3	12.2	-	13.9	13.9	13.8	-	15.8	15.8	15.7	-	15.8	15.8	15.7	-	
		Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	406	407	409	-	457	458	460	-	511	513	514	-	511	513	514	-	
	Lo PR	130	131	135	-	138	139	142	-	144	146	149	-	150	151	154	-	155	157	160	-	162	164	167	-	162	164	167	-		
	1100	MBh	41.0	41.6	42.8	44.7	40.7	41.2	42.5	44.3	39.6	40.2	41.4	43.3	37.8	38.3	39.6	41.4	35.5	36.1	37.3	39.2	33.5	34.0	35.3	37.1	33.5	34.0	35.3	37.1	
		S/T	0.76	0.68	0.54	0.40	0.77	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53	
		ΔT	25	23	19	16	25	23	19	15	25	23	19	16	25	23	19	15	24	22	19	15	25	24	20	16	25	24	20	16	
		kW	2.31	2.30	2.30	2.32	2.58	2.58	2.57	2.60	2.89	2.89	2.88	2.90	3.22	3.22	3.21	3.23	3.59	3.59	3.58	3.60	4.02	4.02	4.02	4.04	4.02	4.02	4.02	4.04	
Amps		8.2	8.1	8.1	8.2	9.3	9.3	9.3	9.4	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2	13.7	13.7	13.7	13.8	15.6	15.6	15.6	15.7	15.6	15.6	15.7	15.7		
1325	Hi PR	267	268	270	275	309	310	312	317	353	354	356	361	400	401	403	408	451	453	454	459	506	507	509	514	506	507	509	514		
	Lo PR	125	126	130	135	132	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	159	162	167	157	159	162	167		
	MBh	41.5	42.1	43.3	45.2	41.2	41.7	43.0	44.8	40.1	40.7	41.9	43.8	38.2	38.8	40.1	41.9	36.0	36.6	37.8	39.7	33.9	34.5	35.7	37.6	33.9	34.5	35.7	37.6		
	S/T	0.82	0.74	0.60	0.45	1.00	0.75	0.61	0.46	1.00	0.77	0.63	0.48	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.53	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58		
	ΔT	24	22	18	14	24	22	18	14	24	22	18	15	24	22	18	14	23	21	18	14	24	23	19	15	24	23	19	15		
1325	kW	2.32	2.32	2.31	2.33	2.59	2.59	2.59	2.61	2.90	2.90	2.89	2.91	3.23	3.23	3.23	3.25	3.60	3.60	3.60	3.62	4.04	4.04	4.03	4.05	4.04	4.04	4.03	4.05		
	Amps	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.1	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.6	15.7	15.7	15.6	15.7	15.7		
	Hi PR	269	270	272	277	311	312	314	319	355	356	358	363	402	404	405	410	453	455	457	461	508	509	511	516	508	509	511	516		
	Lo PR	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	163	169	159	160	163	169		
	MBh	42.6	43.2	44.5	46.3	42.3	42.9	44.1	46.0	41.2	41.8	43.0	44.9	39.4	40.0	41.2	43.0	37.1	37.7	38.9	40.8	35.1	35.6	36.9	38.7	35.1	35.6	36.9	38.7		
1325	S/T	0.86	0.78	0.64	0.50	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.63	1.00	1.00	0.77	0.63		
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14	23	21	17	14		
	kW	2.34	2.34	2.33	2.35	2.61	2.61	2.61	2.63	2.92	2.92	2.91	2.93	3.25	3.25	3.24	3.27	3.62	3.62	3.61	3.64	4.06	4.06	4.05	4.07	4.06	4.06	4.05	4.07		
	Amps	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.5	10.8	10.8	10.8	10.9	12.3	12.3	12.2	12.3	13.9	13.9	13.8	13.9	15.8	15.8	15.7	15.8	15.8	15.7	15.8	15.8		
	Hi PR	272	274	276	280	315	316	318	322	359	360	362	366	406	407	409	414	457	458	460	465	512	513	515	519	512	513	515	519		
Lo PR	130	132	135	140	138	139	142	148	144	146	149	154	150	151	155	160	165	155	157	160	165	162	164	167	172	162	164	167	172		
DB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions.																										kW = Total system power			
		Amperes and low pressures are measured at the liquid and suction access fittings.																										Amperes: Unit amperes (compressor + evaporator + condenser fan motors)			

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

		65						75						85						95						105						115																	
IDB	Airflow	Outdoor Ambient Temperature																		Entering Indoor Wet Bulb Temperature																													
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	MBh	41.2	41.8	43.0	44.9	40.9	41.5	42.7	44.6	39.8	40.4	41.6	43.5	38.0	38.5	39.8	41.6	35.7	36.3	37.5	39.4	33.7	34.2	35.5	37.3	1.00	0.81	0.67	0.53	1.00	0.85	0.71	0.56	1.00	1.00	0.75	0.60	1.00	1.00	0.80	0.65								
	S/T	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	19	30	28	24	21	29	27	23	20	29	27	23	19	30	28	24	21												
	ΔT	2.31	2.31	2.30	2.32	2.58	2.58	2.58	2.60	2.89	2.89	2.88	2.90	3.22	3.22	3.21	3.24	3.59	3.59	3.58	3.61	4.03	4.02	4.02	4.04	8.2	8.2	8.1	8.2	9.4	9.3	9.3	9.4	10.7	10.7	10.7	10.7	12.1	12.1	12.2	13.7	13.7	13.8	15.6	15.6	15.7			
	Amps	267	268	270	275	309	311	312	317	353	355	356	361	401	402	404	408	452	453	455	460	506	508	510	514	267	268	270	275	309	311	312	317	353	355	356	361	401	402	404	408	452	453	455	460	506	508	510	514
	Hi PR	125	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	161	158	159	162	168	125	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	161	158	159	162	168			
	Lo PR	125	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	161	158	159	162	168	125	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	161	158	159	162	168			
1100	MBh	41.7	42.3	43.5	45.4	41.4	42.0	43.2	45.0	40.3	40.9	42.1	44.0	38.5	39.0	40.3	42.1	36.2	36.8	38.0	39.9	34.2	34.7	36.0	37.8	1.00	0.87	0.73	0.58	1.00	0.87	0.74	0.59	1.00	1.00	0.80	0.66	1.00	1.00	0.86	0.71								
	S/T	28	26	22	19	28	26	22	19	28	26	23	19	28	26	22	19	27	26	22	18	29	27	23	20	28	26	22	19	28	26	22	18	29	27	23	20	28	26	22	18								
	ΔT	2.32	2.32	2.31	2.34	2.60	2.59	2.59	2.61	2.90	2.90	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.60	3.60	3.62	4.04	4.04	4.03	4.05	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	13.8	13.8	15.7	15.7	15.7				
	Amps	269	271	272	277	311	313	314	319	355	357	358	363	403	404	406	411	454	455	457	462	509	510	512	516	269	271	272	277	311	313	314	319	355	357	358	363	403	404	406	411	454	455	457	462	509	510	512	516
	Hi PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169	127	129	132	137	135	136	139	145	141	143	146	151	147	148	152	157	162	159	161	164	169			
	Lo PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169	127	129	132	137	135	136	139	145	141	143	146	151	147	148	152	157	162	159	161	164	169			
1325	MBh	42.9	43.4	44.7	46.5	42.5	43.1	44.3	46.2	41.4	42.0	43.2	45.1	39.6	40.2	41.4	43.3	37.3	37.9	39.1	41.0	35.3	35.9	37.1	39.0	1.00	0.91	0.77	0.63	1.00	0.92	0.78	0.63	1.00	1.00	0.85	0.70	1.00	1.00	0.90	0.75								
	S/T	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	21	17	27	25	22	18	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17				
	ΔT	2.34	2.34	2.33	2.35	2.61	2.61	2.61	2.63	2.92	2.92	2.91	2.94	3.25	3.25	3.25	3.27	3.62	3.62	3.62	3.64	4.06	4.06	4.05	4.07	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.9	12.3	12.3	12.3	13.9	13.9	15.8	15.8	15.7				
	Amps	273	274	276	281	315	316	318	323	359	360	362	367	406	408	410	414	458	459	461	465	512	513	515	520	273	274	276	281	315	316	318	323	359	360	362	367	406	408	410	414	458	459	461	465	512	513	515	520
	Hi PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173
	Lo PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173
85	MBh	41.9	42.5	43.7	45.6	41.6	42.1	43.4	45.2	40.5	41.1	42.3	44.2	38.7	39.2	40.5	42.3	36.4	37.0	38.2	40.1	34.4	34.9	36.2	38.0	1.00	0.92	0.78	0.64	1.00	0.90	0.76	0.61	1.00	1.00	0.85	0.71	1.00	1.00	0.80	0.66								
	S/T	33	31	27	23	33	31	27	23	33	31	27	24	33	31	27	23	32	30	27	23	33	32	28	24	33	31	27	23	33	31	27	23	32	30	27	23	32	30	27	23	32	30	27	23				
	ΔT	2.31	2.31	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.89	2.91	3.23	3.22	3.22	3.24	3.60	3.59	3.59	3.61	4.03	4.03	4.02	4.05	8.2	8.2	8.2	8.2	9.4	9.4	9.3	9.4	10.7	10.7	10.7	10.8	12.2	12.1	12.1	12.2	13.8	13.8	15.7	15.7	15.7			
	Amps	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	454	456	461	508	509	511	515	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	454	456	461	508	509	511	515
	Hi PR	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170
	Lo PR	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170
	MBh	42.4	43.0	44.2	46.1	42.1	42.6	43.9	45.7	41.0	41.6	42.8	44.7	39.2	39.7	41.0	42.8	36.9	37.5	38.7	40.6	34.8	35.4	36.7	38.5	1.00	0.97	0.83	0.69	1.00	0.90	0.76	0.61	1.00	1.00	0.85	0.71	1.00	1.00	0.80	0.66								
	S/T	32	30	26	22	31	30	26	22	32	30	26	23	31	30	26	22	31	29	26	22	32	31	27	23	32	30	26	22	31	30	26	22	31	29	26	22	32	31	27	23	32	31	27	23				
	ΔT	2.33	2.32	2.32	2.34	2.60	2.60	2.59	2.62	2.91	2.91	2.90	2.92	3.24	3.24	3.23	3.25	3.61	3.61	3.60	3.62	4.04	4.04	4.04	4.06	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.8	10.8	10.7	10.8	12.2	12.2	12.2	12.3	13.8	13.8	15.7	15.7	15.7			
	Amps	271	272	274	278	313	314	316	320	357	358	360	364	404	405	407	412	455	456	458	463	510	511	513	517	271	272	274	278	313	314	316	320	357	358	360	364	404	405	407	412	455	456	458	463	510	511	513	517
	Hi PR	129	130	134	139	137	138	141	147	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	129	130	134	139	137	138	141	147	143	145	148	153	149	150										

		Outdoor Ambient Temperature												115																							
		65						75						85						95						105						115					
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	1700	MBh	57.7	58.5	60.2	-	57.2	58.0	59.7	-	55.7	56.5	58.2	-	53.2	54.0	55.7	-	50.0	50.8	52.5	-	47.2	48.0	49.7	-	47.2	48.0	49.7	-	47.2	48.0	49.7	-			
		S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-			
		ΔT	20	18	14	-	20	18	14	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-			
		kW	3.69	3.69	3.68	-	4.13	4.12	4.12	-	4.61	4.61	4.60	-	5.14	5.14	5.13	-	5.73	5.73	5.72	-	6.42	6.42	6.41	-	6.42	6.42	6.41	-	6.42	6.42	6.41	-			
		Amps	13.1	13.1	13.0	-	15.0	14.9	14.9	-	17.1	17.1	17.0	-	19.4	19.4	19.3	-	21.9	21.9	21.9	-	24.9	24.9	24.9	-	24.9	24.9	24.9	-	24.9	24.9	24.9	-			
		Hi PR	281	282	284	-	325	326	328	-	371	372	374	-	421	422	424	-	474	475	477	-	531	532	534	-	531	532	534	-	531	532	534	-			
		Lo PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	155	159	-	154	155	159	-	154	155	159	-			
		MBh	58.1	58.9	60.6	-	57.6	58.4	60.1	-	56.1	56.9	58.6	-	53.6	54.4	56.1	-	50.4	51.2	52.9	-	47.6	48.4	50.1	-	47.6	48.4	50.1	-	47.6	48.4	50.1	-			
		S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-			
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-	21	19	15	-			
70	1800	kW	3.70	3.70	3.69	-	4.14	4.13	4.13	-	4.62	4.62	4.61	-	5.15	5.15	5.14	-	5.74	5.74	5.73	-	6.43	6.43	6.42	-	6.43	6.43	6.42	-	6.43	6.43	6.42	-			
		Amps	13.1	13.1	13.1	-	15.0	15.0	15.0	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-	22.0	22.0	21.9	-	25.0	25.0	24.9	-	25.0	25.0	24.9	-	25.0	25.0	24.9	-			
		Hi PR	282	283	285	-	326	327	329	-	372	373	375	-	422	423	425	-	475	476	478	-	532	533	535	-	532	533	535	-	532	533	535	-			
		Lo PR	124	125	129	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-	155	157	160	-	155	157	160	-			
		MBh	58.6	59.4	61.1	-	58.1	58.9	60.6	-	56.6	57.4	59.1	-	54.0	54.8	56.5	-	50.9	51.7	53.4	-	48.0	48.8	50.5	-	48.0	48.8	50.5	-	48.0	48.8	50.5	-			
		S/T	0.70	0.62	0.49	-	0.71	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.75	0.61	-	1.00	0.75	0.61	-			
		ΔT	19	17	14	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-			
		kW	3.71	3.71	3.70	-	4.15	4.14	4.13	-	4.63	4.63	4.62	-	5.16	5.16	5.15	-	5.75	5.75	5.74	-	6.44	6.44	6.43	-	6.44	6.44	6.43	-	6.44	6.44	6.43	-			
		Amps	13.1	13.1	13.1	-	15.0	15.0	15.0	-	17.2	17.1	17.1	-	19.5	19.4	19.4	-	22.0	22.0	22.0	-	25.0	25.0	25.0	-	25.0	25.0	25.0	-	25.0	25.0	25.0	-			
		Hi PR	283	284	286	-	327	328	330	-	373	374	376	-	423	424	426	-	476	477	479	-	533	535	537	-	533	535	537	-	533	535	537	-			
Lo PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-					
75	1700	MBh	57.8	58.6	60.3	62.9	57.2	58.0	59.8	62.4	55.8	56.6	58.3	60.9	53.2	54.0	55.7	58.3	50.1	50.9	52.6	55.2	47.2	48.0	49.7	52.3	47.2	48.0	49.7	52.3	47.2	48.0	49.7	52.3			
		S/T	0.80	0.72	0.58	0.44	0.80	0.73	0.59	0.45	1.00	0.75	0.62	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	1.00	0.71	0.57	1.00	1.00	0.71	0.57	1.00	1.00	0.71	0.57			
		ΔT	24	22	19	15	24	22	19	15	25	23	19	15	24	22	19	15	24	22	18	15	25	23	20	16	25	23	20	16	25	23	20	16			
		kW	3.69	3.68	3.68	3.71	4.12	4.12	4.11	4.15	4.61	4.61	4.60	4.63	5.14	5.14	5.13	5.16	5.73	5.72	5.72	5.75	6.42	6.42	6.41	6.44	6.42	6.42	6.41	6.44	6.42	6.42	6.41	6.44			
		Amps	13.1	13.0	13.0	13.2	15.0	14.9	14.9	15.1	17.1	17.1	17.0	17.2	19.4	19.3	19.3	19.5	21.9	21.9	21.9	22.0	24.9	24.9	24.9	25.0	24.9	24.9	24.9	25.0	24.9	24.9	25.0	25.0			
		Hi PR	281	282	284	289	325	326	328	333	371	372	374	379	421	422	424	429	474	476	478	482	531	533	535	539	531	533	535	539	531	533	535	539			
		Lo PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164			
		MBh	58.2	59.0	60.7	63.3	57.6	58.5	60.2	62.8	56.2	57.0	58.7	61.3	53.6	54.4	56.1	58.7	50.5	51.3	53.0	55.6	47.6	48.4	50.1	52.7	47.6	48.4	50.1	52.7	47.6	48.4	50.1	52.7			
		S/T	0.81	0.74	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.81	0.68	0.53	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58			
		ΔT	24	22	18	15	24	22	18	14	24	22	19	15	24	22	18	14	24	22	18	14	25	23	19	15	25	23	19	15	25	23	19	15			
75	1800	kW	3.70	3.69	3.69	3.72	4.13	4.13	4.12	4.16	4.62	4.62	4.61	4.64	5.15	5.14	5.14	5.17	5.74	5.73	5.73	5.76	6.43	6.42	6.42	6.45	6.43	6.42	6.42	6.43	6.42	6.42	6.45				
		Amps	13.1	13.1	13.0	13.2	15.0	15.0	14.9	15.1	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	22.0	21.9	21.9	22.1	25.0	25.0	24.9	25.1	25.0	25.0	24.9	25.1	25.0	25.0	25.1				
		Hi PR	282	284	286	290	326	328	329	334	372	374	376	380	422	423	425	430	475	477	479	483	533	534	536	541	533	534	536	541	533	534	536	541			
		Lo PR	124	125	129	134	131	133	136	141	138	139	142	148	143	145	148	153	149	150	153	158	155	157	160	165	155	157	160	165	155	157	160	165			
		MBh	58.6	59.4	61.1	63.7	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.1	50.9	51.7	53.4	56.0	48.1	48.9	50.6	53.2	48.1	48.9	50.6	53.2	48.1	48.9	50.6	53.2			
		S/T	0.83	0.75	0.62	0.47	0.83	0.76	0.62	0.48	1.00	0.78	0.65	0.50	1.00	0.80	0.67	0.52	1.00	0.83	0.69	0.55	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60			
		ΔT	24	22	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15			
		kW	3.71	3.70	3.70	3.73	4.14	4.14	4.13	4.17	4.63	4.63	4.62	4.65	5.16	5.15	5.15	5.18	5.75	5.74	5.73	5.77	6.44	6.43	6.43	6.46	6.44	6.43	6.43	6.43	6.43	6.43	6.43	6.46			
		Amps	13.1	13.1	13.1	13.2	15.0	15.0	15.0	15.1	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	22.0	22.0	22.0	22.1	25.0	25.0	25.0	25.1	25.0	25.0	25.0	25.1	25.0	25.0	25.1	25.0			
		Hi PR	283	285	287	291	327	329	331	335	373	375	377	381	423	424	426	431	477	478	480	485	534	535	537	542	534	535	537	542	534	535	537	542			
Lo PR	125	126	129	135	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	159	156</																

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

DP14UM2406041 - RISE RANGE: 20° - 50°**

E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	600	50	968	132	30	733	65	34	891	109	1,156	201
0.2	542	57	914	139	31	703	74	36	845	116	1,110	211
0.3	494	67	868	148	33	664	83	38	794	127	1,063	220
0.4	423	73	819	157	35	604	91	41	741	133	1,015	228
0.5	339	78	768	165	36	536	98	44	694	141	971	235
0.6	284	85	723	175	38	483	105	49	634	149	923	241
0.7	217	91	661	177	40	430	111	x	567	157	881	251
0.8	160	96	590	186	43	381	119	x	506	162	832	259

DP14UM3006041 - RISE RANGE: 30° - 60°**

E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	891	113	1,196	190	34	891	113	44	1,107	189	1,285	278
0.2	831	119	1,147	197	36	831	119	46	1,051	197	1,238	284
0.3	780	127	1,102	204	37	780	127	47	1,006	207	1,189	293
0.4	714	135	1,054	212	38	714	135	50	963	215	1,146	300
0.5	639	146	1,009	221	39	639	146	54	906	218	1,105	306
0.6	555	153	955	230	40	555	153	60	842	229	1,058	314
0.7	502	159	897	238	41	502	159	X	773	237	1,011	324
0.8	444	165	828	245	42	444	165	X	690	245	948	329

DP14UM3606041 - RISE RANGE: 30° - 60°**

E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	870	107	1,216	228	31	870	107	42	1,356	298	1,533	408
0.2	792	118	1,149	234	32	792	118	44	1,296	307	1,470	419
0.3	685	130	1,083	246	33	685	130	48	1,234	316	1,416	428
0.4	623	138	1,014	252	34	623	138	51	1,170	327	1,360	434
0.5	549	143	919	265	38	549	143	54	1,104	335	1,307	446
0.6	479	144	850	272	41	479	144	55	1,020	347	1,247	455
0.7	411	155	781	280	43	411	155	58	950	353	1,177	468
0.8	343	161	717	285	44	343	161	X	879	360	1,104	478

X = Not recommend for heat application

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.8" w.c.

DP14UM4208041 - RISE RANGE: 30° - 60°**

E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,090	146	1,363	249	40	1,304	221	43	1,487	317	1,637	444
0.2	1,024	156	1,305	256	42	1,242	230	45	1,433	327	1,593	454
0.3	960	165	1,247	269	45	1,185	241	46	1,378	338	1,541	459
0.4	867	173	1,189	276	46	1,126	249	49	1,323	345	1,497	473
0.5	791	183	1,130	285	48	1,054	258	52	1,265	356	1,450	478
0.6	710	191	1,048	294	50	967	270	54	1,196	365	1,407	485
0.7	644	196	966	305	52	899	278	56	1,124	376	1,357	493
0.8	587	206	901	315	54	832	285	59	1,063	384	1,304	502

DP14UM4808041 - RISE RANGE: 30° - 60°**


E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,090	146	1,363	249	40	1,304	221	43	1,672	418	1,928	626
0.2	1,024	156	1,305	256	42	1,242	230	45	1,626	433	1,874	639
0.3	960	165	1,247	269	45	1,185	241	46	1,575	441	1,836	647
0.4	867	173	1,189	276	46	1,126	249	49	1,525	449	1,780	658
0.5	791	183	1,130	285	48	1,054	258	52	1,468	463	1,735	671
0.6	710	191	1,048	294	50	967	270	54	1,417	471	1,683	677
0.7	644	196	966	305	52	899	278	56	1,362	482	1,629	686
0.8	587	206	901	315	54	832	285	59	1,306	487	1,578	693

DP14UM6108041 - RISE RANGE: 30° - 60°**


E.S.P.	T1 FAN ONLY SPEED		T2 HEATING SPEED			T3 LOW STAGE COOLING SPEED		T4 HIGH STAGE COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,156	158	1,283	200	42	1,283	200	1835	499	1,975	602
0.2	1,077	163	1,224	210	44	1,224	210	1787	498	1,928	616
0.3	1,015	172	1,152	216	46	1,152	216	1735	517	1,877	622
0.4	930	179	1,098	228	49	1,098	228	1681	525	1,837	644
0.5	839	193	1,025	236	51	1,025	236	1638	537	1,782	649
0.6	759	200	945	249	53	945	249	1587	551	1,738	660
0.7	697	206	867	264	56	867	264	1544	558	1,689	664
0.8	632	216	806	271	61	806	271	1495	572	1,634	676

X = Not recommend for heat application


NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.8" w.c.

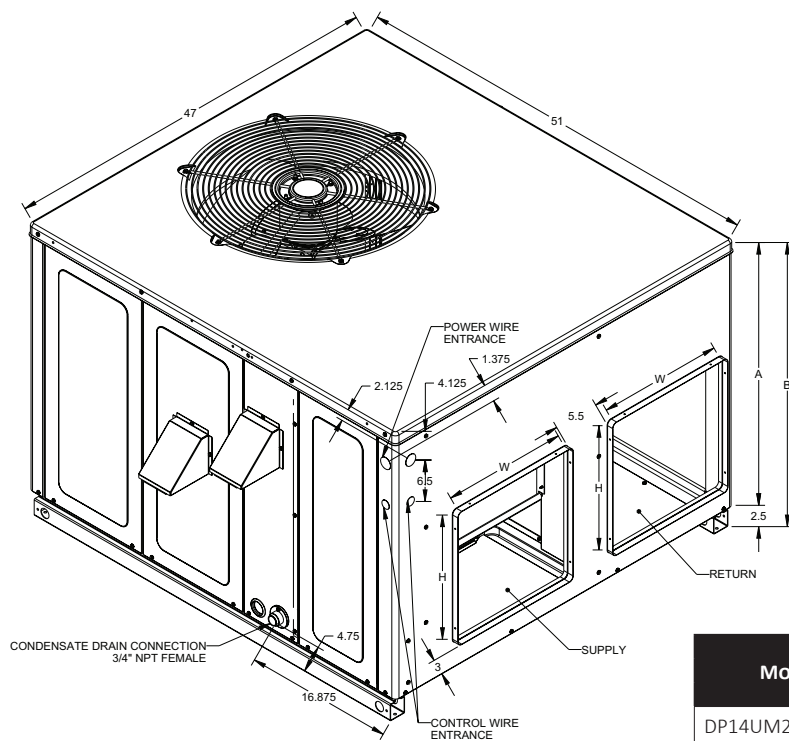

MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
DP14UM2404041A*	47	51	32	34½	Medium
DP14UM3006041A*	47	51	32	34½	Medium
DP14UM3606041C*	47	51	32	34½	Medium
DP14UM4208041C*	47	51	32	42½	Large
DP14UM4808041C*	47	51	40	42½	Large
DP14UM6108041C*	47	51	40	42½	Large

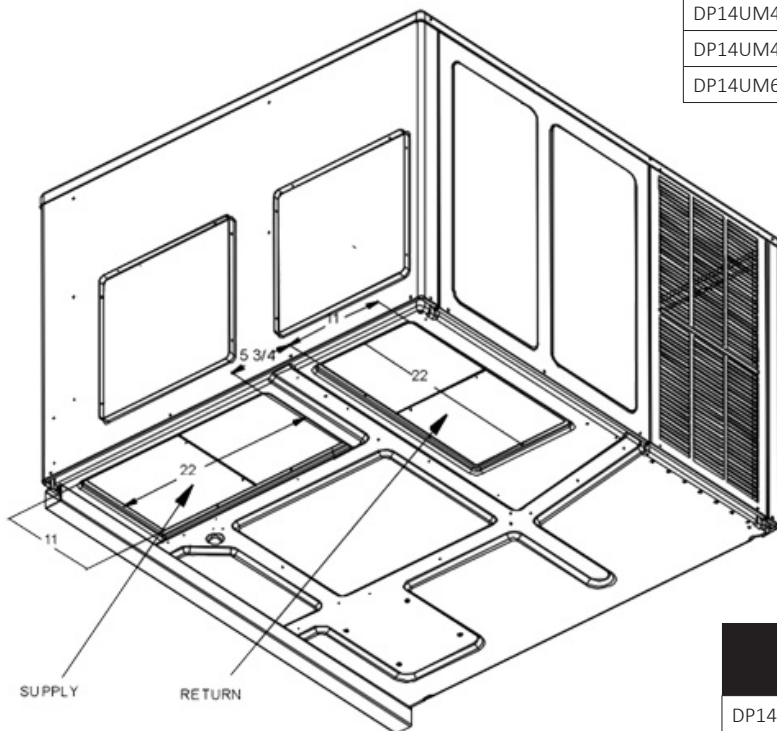

MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
DP14UM2404041A*	16	16	16	16
DP14UM3006041A*	16	16	16	16
DP14UM3606041C*	16	16	16	16
DP14UM4208041C*	16	18	16	18
DP14UM4808041C*	16	18	16	18
DP14UM6108041C*	16	18	16	18

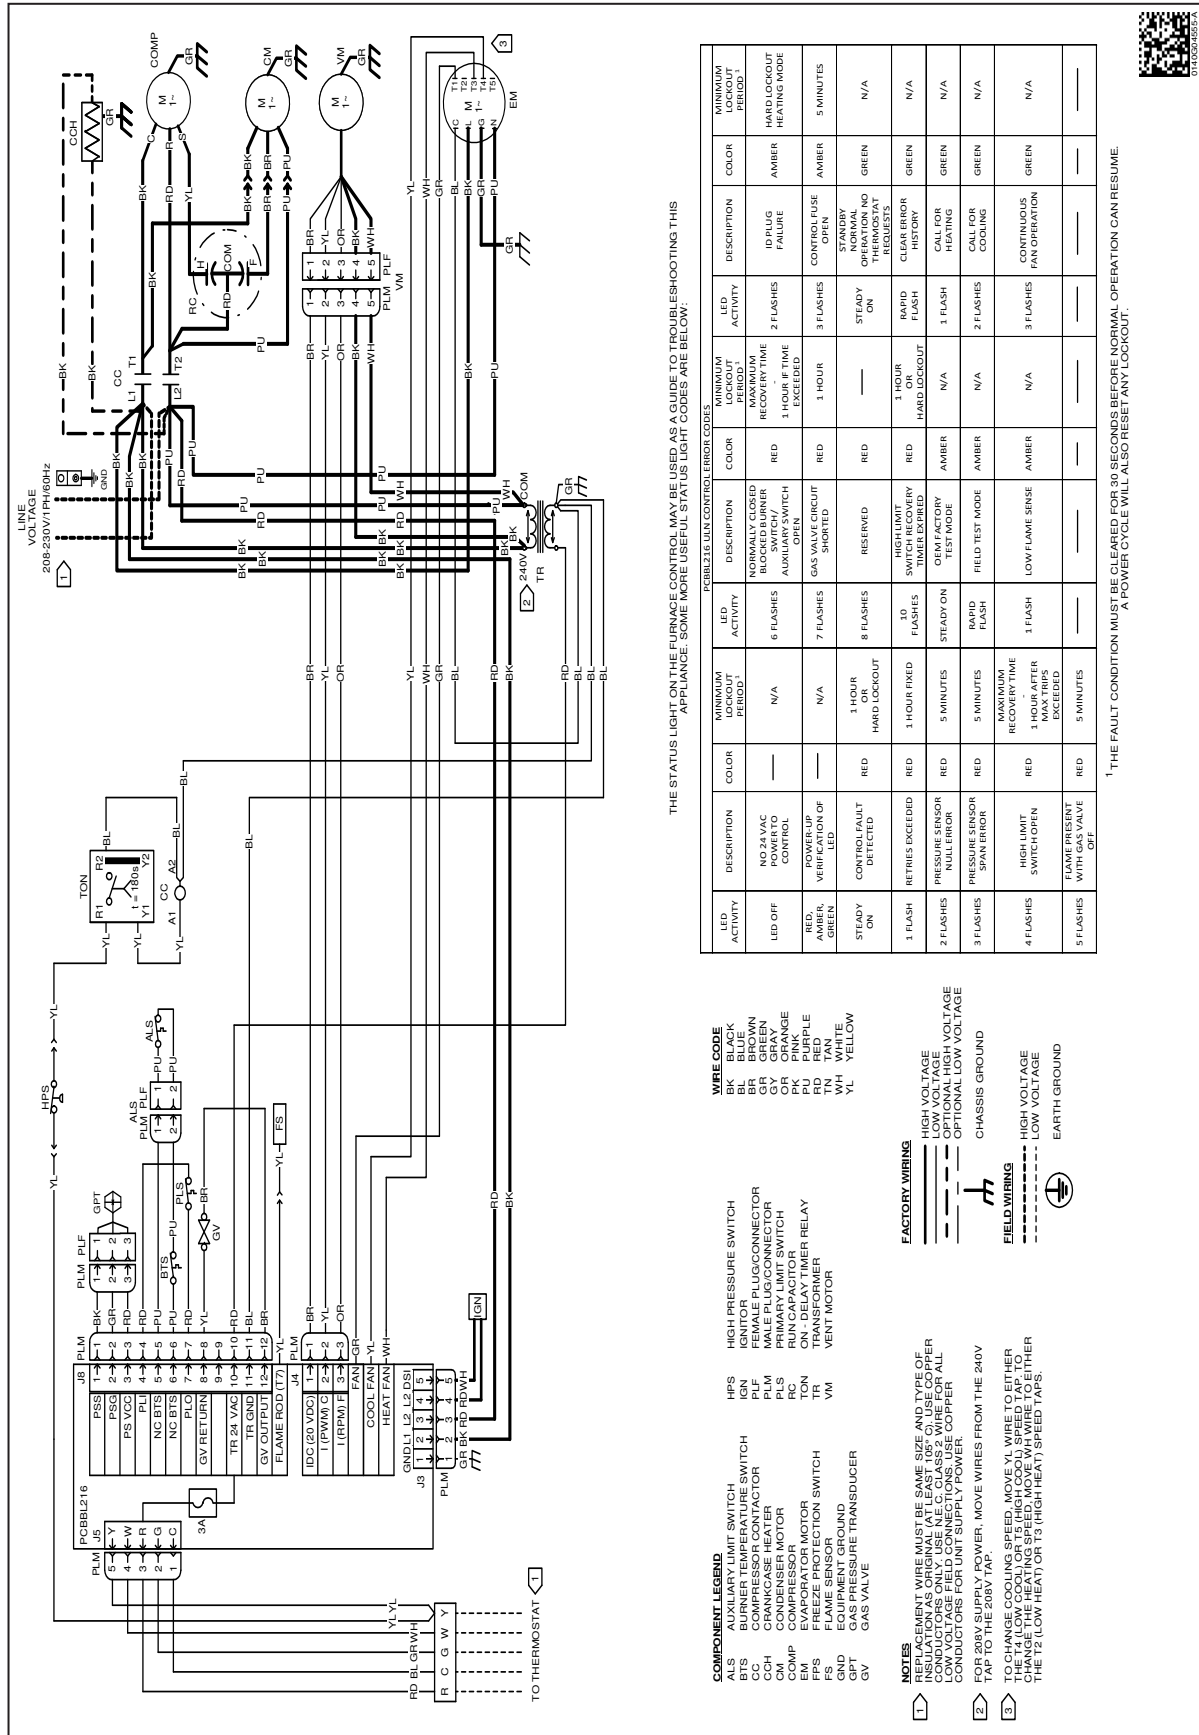

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

