



Air Conditioning & Heating



PRODUCT SPECIFICATIONS

CLQ SERIES

14 SEER

HIGH-EFFICIENCY
SPLIT SYSTEM
AIR CONDITIONER

2 TO 5 TON



The CLQ split system air conditioner features an attractive louvered metal guard that protects the coil from damage. Designed for ground-level or rooftop mount, the raised base pan elevates the unit above the slab for excellent water drainage.

Standard Features

- High-efficiency scroll compressor
- Totally enclosed and permanently lubricated 8-pole, 850-RPM PSC condenser motor
- Copper tube/aluminum fin coil
- Brass suction and liquid service valve with sweat connections
- Fully charged for 15' of tubing length
- Factory-installed liquid line filter dryer
- Compressor sound blanket
- Quiet-operating top discharge
- Contactor with lug connection
- Ground lug connection

Air Handler and Coil Compatibilities

- ARUF, ARPT and AEPT multi-position electric heat air handlers
- MBR/MBE modular blower
- CA, CH and H indoor coils

Cabinet Features

- Polyester powder paint provides premium durability and improved UV protection
- Heavy-gauge, zinc-clad, G90 galvanized steel
- Louvered guard protects coil from damage and adds strength to the unit
- Bottom pan rails elevate the unit above slab
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Accessories

- Standard room thermostat with 1-stage cool / 1-stage heat (CHT18-60 or CHSATG)
- Digital room thermostat with 1-stage cool / 1-stage heat (CH70TG)
- Outdoor Thermostat (OT18-60)
- Low Ambient Kit (LA-01)



PRODUCT SPECIFICATIONS

SPECIFICATIONS

	CLQ24-1A/-1B	CLQ30-1A/-1B	CLQ36-1/-1B	CLQ36-1C	CLQ42-1/-1B	CLQ48-1/-1B	CLQ60-1/-1B
Capacities							
Nominal Cooling (BTU/h)	21,000	29,000	35,000	35,000	41,000	45,000	55,000
SEER	14	14	14	14	14	14	14
Decibels	74	74		74	76	76	76
Compressor							
RLA	9.6	13.6	13.5	14.1	17.9	18	22.1
LRA	45	63	72.5	68	88	104	137
Condenser Fan Motor							
Horsepower	1/6	1/6	1/4	1/4	1/4	1/4	1/4
FLA							
Refrigeration System							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
Valve Type	Sweat						
Electrical Data							
Voltage/Hz-Phase	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Min. Circuit Ampacity ¹	12.9	17.9	18.5	19.2	24	24.1	29.2
Max Overcurrent Protection (amps) ²	20	30	30	30	40	40	50
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Power Supply Conduit Size							
Ship Weight (lbs)	206	250	260	244	269	313	337


¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.


Note: Always check the S&R plate for electrical data on the unit being installed.

DIMENSIONS

CLQ24-36 MODELS

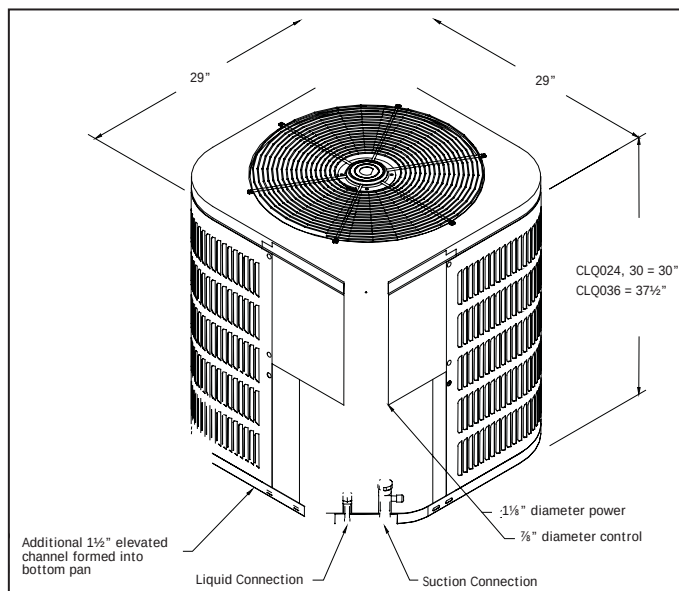

CLQ42-60 MODELS

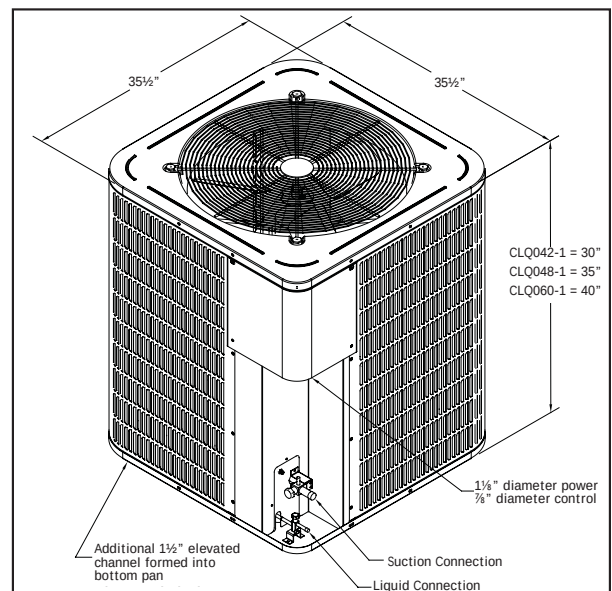

PERFORMANCE RATINGS

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ24-1*	AEPF18301A*	23,000	17,200	15	13.4	892547
	AEPT030-00*-1*	23,000	17,200	15	13.4	517562
	ARPF18241A*	22,000	16,390	13.5	12	892257
	ARPF30301A*	22,400	16,688	14	12.5	892578
	ARPT032-00*-1*	22,000	16,300	13.5	12	517603
	ARPT042-00*-1*	22,400	16,500	14	12.5	517609
	ARUF032-00*-1*	22,000	16,300	13.5	12	517604
	ARUF042-00*-1*	22,400	16,500	14	12.5	517596
	ARUF18241A*	22,000	16,390	13.5	12	893042
	ARUF30301A*	22,400	16,688	14	12.5	891641
	CA*F030*2*+EEP	21,000	15,600	13.5	12	503621
	CA*F030*2*+G*V80704B**	22,000	16,390	14.5	13	551590
	CA*F042*2*+EEP	21,000	15,750	13.5	12	901356
	CA*F048*2*+EEP	22,000	16,300	14	12.5	503624
	CA*F048*2*+G*V80905C**	23,000	17,000	15	13.4	520963
	CA*F048*2*+G*V90704C**	23,000	17,200	15	13.4	503625
	CA*F1824*6A*+EEP	21,000	15,645	13.5	12	892991
	CA*F1824*6A*+G*V80704B**	22,000	16,390	14.5	12.8	892884
	CA*F3636*6A*+EEP	22,000	16,390	14	12.5	892840
	CA*F3636*6A*+G*V80905C**	23,000	17,135	15	13.4	892175
	CA*F3636*6A*+G*V90704C**	23,000	17,135	15	13.4	892090
	CHPF030A2*+EEP	21,000	15,600	13.5	12	503630
	CHPF030A2*+G*V80704B**	22,000	16,390	14.5	13	551582
	CHPF048D2*+EEP	22,000	16,300	14	12.5	503633
	CHPF048D2*+G*V80905C**	23,000	17,000	15	13.4	520957
	CHPF048D2*+G*V90704C**	23,000	17,200	15	13.4	503634
	CHPF1824A6A*+EEP	21,000	15,645	13.5	12	892558
	CHPF1824A6A*+G*V80704B**	22,000	16,390	14.5	12.8	892855
	CHPF3636B6A*+EEP	21,400	16,050	14	12	1038153
	CHPF3642D6A*+EEP	22,000	16,390	14	12.5	891964
	CHPF3642D6A*+G*V80905C**	23,000	17,135	15	13.4	892382
	CHPF3642D6A*+G*V90704C**	23,000	17,135	15	13.4	892620
	CHPX048D2*+G*V90704C**	23,000	17,135	15	13.4	503638
	CSCF1824N6A*+EEP	22,000	16,390	13.5	12	892978
	CSCF1824N6A*+G*V80704B**	22,000	16,390	14.5	12.8	892531
	CSCF1824N6A*+G*V90453B**	22,000	16,500	14.5	12.8	1008555
	CSCF3036N6A*+EEP	23,000	17,135	14	12.5	893177
	H36F+EEP	22,000	16,300	13.5	12	503639
	H36F+G*V80704B**	22,000	16,390	14.5	13	551585
	H36F+G*V90453B**	22,000	16,500	14.5	12.8	1008551
	H49F+EEP	23,000	17,200	14	12.5	503641

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:

- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat Quantity.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ30-1*	AEPF18301A*	27,000	19,980	14.5	13	892529
	AEPF30361A*	29,000	21,460	15	13.4	891972
	AEPT030-00*-1*	27,000	19,950	14.5	12.8	517569
	AEPT036-00*-1*	29,000	21,460	15	13.4	517610
	ARPF18241A*	27,000	19,980	13.5	12	892893
	ARPT032-00*-1*	27,000	19,950	13.5	12	517586
	ARUF032-00*-1*	27,000	19,950	13.5	12	517572
	ARUF18241A*	27,000	19,980	13.5	12	892905
	CA*F030*2*+EEP	27,000	19,950	13.5	12	503654
	CA*F042*2*+G*V80704B**	27,000	19,980	14.5	12.8	551599
	CA*F042*2*+G*V90704C**	27,000	19,950	14.5	12.8	503656
	CA*F061*2*+EEP	29,000	21,460	14	12.5	503657
	CA*F061*2*+G*V80905C**	29,000	21,460	15	13.4	520979
	CA*F061*2*+G*V90905D**	29,000	21,460	15	13.4	503658
	CA*F1824*6A*+EEP	27,000	19,980	13.5	12	892443
	CA*F3131*6A*+G*V80704B**	27,000	19,980	14.5	12.8	891794
	CA*F3131*6A*+G*V90704C**	27,000	19,980	14.5	12.8	892305
	CA*F3636*6A*+EEP	28,000	20,720	13.5	12	1038149
	CA*F4860*6A*+EEP	29,000	21,460	14	12.5	892383
	CA*F4860*6A*+G*V80905C**	29,000	21,460	15	13.4	892712
	CA*F4860*6A*+G*V90905D**	29,000	21,460	15	13.4	892219
	CHPF030A2*+EEP	27,000	19,950	13.5	12	503664
	CHPF042B2*+G*V80704B**	27,000	19,980	14.5	12.8	551594
	CHPF042B2*+G*V90704C**	27,000	19,950	14.5	12.8	503665
	CHPF060D2*+EEP	29,000	21,460	14	12.5	503666
	CHPF060D2*+G*V80905C**	29,000	21,460	15	13.4	520984
	CHPF060D2*+G*V90905D**	29,000	21,460	15	13.4	503667
	CHPF1824A6A*+EEP	27,000	19,980	13.5	12	892372
	CHPF2430B6A*+G*V80704B**	27,000	19,980	14.5	12.8	892415
	CHPF2430B6A*+G*V90704C**	27,000	19,980	14.5	12.8	892289
	CHPF3642D6A*+EEP	28,000	20,720	14	12.5	1038147
	CHPF4860D6A*+EEP	29,000	21,460	14	12.5	892527
	CHPF4860D6A*+G*V80905C**	29,000	21,460	15	13.4	891645
	CHPF4860D6A*+G*V90905D**	29,000	21,460	15	13.4	891792
	CSCF1824N6A*+EEP	27,000	19,980	13.5	12	892859
	CSCF1824N6A*+G*V80704B**	27,000	19,980	14.5	13	1008554
	CSCF1824N6A*+G*V90453B**	27,000	19,980	14.5	13	1008559
	CSCF4860N6A*+EEP	29,000	21,460	14	12.5	892207
	CSCF4860N6A*+G*V80905C**	29,000	21,460	15	13.4	892739
	CSCF4860N6A*+G*V90905D**	29,000	21,460	15	13.4	892429
	H36F+EEP	27,000	19,950	13.5	12	503673
	H36F+G*V80704B**	27,000	19,980	14.5	13	1008544
	H36F+G*V90453B**	27,000	19,980	14.5	13	1008550
	H61F+EEP	29,000	21,460	14	12.5	503675
	H61F+G*V80905C**	29,000	21,460	15	13.4	527373
	H61F+G*V90905D**	29,000	21,460	15	13.4	527369

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ36-1*	AEPF30361A*	35,000	24,850	15	13.4	893068
	AEPT036-00*-1*	35,000	25,000	15	13.4	517579
	ARPF36421A*	34,400	24,424	13.5	12	892405
	ARPT049-00*-1*	34,400	24,500	13.5	12	517594
	ARUF049-00*-1*	34,400	24,500	13.5	12	517593
	ARUF36421A*	34,400	24,424	13.5	12	893113
	CA*F060*2*+EEP	33,400	24,500	13.5	12	503690
	CA*F060*2*+G*V80905C**	34,400	24,500	14.5	12.8	521006
	CA*F060*2*+G*V90704C**	34,000	24,140	14	12.5	555795
	CA*F060*2*+G*V90905D**	34,400	24,500	14.5	12.8	503691
	CA*F060*2*+MBE1600**-1	34,600	24,566	14.5	12.8	1038154
	CA*F061*2*+EEP	35,000	25,000	14	12.5	503693
	CA*F061*2*+G*V81155C**	35,000	25,000	15	13.4	521015
	CA*F061*2*+G*V91155D**	35,000	25,000	15	13.4	518831
	CA*F3642*6A*+EEP	33,400	24,500	13.5	12	892064
	CA*F3642*6A*+G*V80905C**	34,400	24,424	14.5	12.8	892268
	CA*F3642*6A*+G*V90704C**	34,000	24,140	14	12.5	892403
	CA*F3642*6A*+G*V90905D**	34,400	24,424	14.5	12.8	892427
	CA*F4860*6A*+EEP	35,000	24,850	14	12.5	893027
	CA*F4860*6A*+G*V81155C**	35,000	24,850	15	13.4	891682
	CA*F4860*6A*+G*V91155D**	35,000	24,850	15	13.4	892916
	CHPF048D2*+EEP	33,400	24,500	13.5	12	503699
	CHPF048D2*+G*V80905C**	34,400	24,500	14.5	12.8	520995
	CHPF048D2*+G*V90905D**	34,400	24,500	14.5	12.8	503700
	CHPF060D2*+EEP	35,000	25,000	14	12.5	503702
	CHPF060D2*+G*V81155C**	35,000	25,000	15	13.4	520986
	CHPF060D2*+G*V91155D**	35,000	25,000	15	13.4	503703
	CHPF3642D6A*+EEP	33,400	24,382	13.5	12	892781
	CHPF3642D6A*+G*V80905C**	34,400	24,424	14.5	12.8	892016
	CHPF3642D6A*+G*V90905D**	34,400	24,424	14.5	12.8	891937
	CHPF4860D6A*+EEP	35,000	24,850	14	12.5	891934
	CHPF4860D6A*+G*V81155C**	35,000	24,850	15	13.4	891861
	CHPF4860D6A*+G*V91155D**	35,000	24,850	15	13.4	891927
	CSCF3642N6A*+EEP	34,400	24,424	13.5	12	891806
	CSCF4860N6A*+EEP	36,000	26,660	14	12.5	892639
	CSCF4860N6A*+G*V81155C**	35,000	24,850	15	13.4	892934
	CSCF4860N6A*+G*V91155D**	35,000	24,850	15	13.4	892928
	H60F+EEP	34,400	24,500	13.5	12	503709
	H61F+EEP	36,000	26,660	14	12.5	503711
	H61F+G*V81155C**	35,000	25,000	15	13.4	527398
	H61F+G*V91155D**	35,000	25,000	15	13.4	527375

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:

- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat Quantity.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ42-1*	AEPF42601A*	41,000	30,955	15	13.4	891776
	AEPT060-00*-1*	41,000	31,000	15	13.4	517568
	ARPF36421A*	40,000	30,200	13.5	12	892809
	ARPT049-00*-1*	40,000	30,000	13.5	12	517587
	ARUF049-00*-1*	40,000	30,000	13.5	12	517589
	ARUF36421A*	40,000	30,200	13.5	12	893083
	CA*F060*2*+EEP	40,000	30,000	13.5	12	503726
	CA*F060*2*+G*V80905C**	40,000	30,000	14.5	12.8	521005
	CA*F060*2*+G*V90905D**	40,000	30,000	14.5	12.8	503727
	CA*F061*2*+EEP	41,000	31,000	14	12.5	503729
	CA*F061*2*+G*V81155C**	41,000	31,000	15	13.4	520988
	CA*F061*2*+G*V90704C**	40,500	30,578	14.5	12.8	565498
	CA*F061*2*+G*V91155D**	41,000	31,000	15	13.4	503730
	CA*F3642*6A*+EEP	40,000	30,200	13.5	12	892024
	CA*F3642*6A*+G*V80905C**	40,000	30,200	14.5	12.8	893034
	CA*F3642*6A*+G*V90905D**	40,000	30,200	14.5	12.8	893174
	CA*F4860*6A*+EEP	41,000	30,955	14	12.5	893015
	CA*F4860*6A*+G*V81155C**	41,000	30,955	15	13.4	891876
	CA*F4860*6A*+G*V90704C**	40,500	30,578	14.5	12.8	891902
	CA*F4860*6A*+G*V91155D**	41,000	30,955	15	13.4	892048
	CHPF048D2*+EEP	40,000	30,000	13.5	12	503736
	CHPF048D2*+G*V80905C**	40,000	30,000	14.5	12.8	521010
	CHPF048D2*+G*V90905D**	40,000	30,000	14.5	12.8	503737
	CHPF060D2*+EEP	41,000	31,000	14	12.5	503739
	CHPF060D2*+G*V81155C**	41,000	31,000	15	13.4	521007
	CHPF060D2*+G*V91155D**	41,000	31,000	15	13.4	503740
	CHPF3642D6A*+EEP	40,000	30,200	13.5	12	892140
	CHPF3642D6A*+G*V80905C**	40,000	30,200	14.5	12.8	892539
	CHPF3642D6A*+G*V90905D**	40,000	30,200	14.5	12.8	892580
	CHPF4860D6A*+EEP	41,000	30,955	14	12.5	892472
	CHPF4860D6A*+G*V81155C**	41,000	30,955	15	13.4	892457
	CHPF4860D6A*+G*V91155D**	41,000	30,955	15	13.4	892837
	CSCF3642N6A*+EEP	40,000	30,200	13.5	12	892356
	CSCF4860N6A*+EEP	41,000	30,955	14	12.5	892501
	CSCF4860N6A*+G*V81155C**	41,000	30,955	15	13.4	891974
	CSCF4860N6A*+G*V91155D**	41,000	30,955	15	13.4	892103
	H60F+EEP	40,000	30,000	13.5	12	503746
	H61F+EEP	41,000	31,000	14	12.5	503748
	H61F+G*V81155C**	41,000	31,000	15	13.4	527366
	H61F+G*V91155D**	41,000	31,000	15	13.4	527386

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ48-1*	AEPF42601A*	45,000	34,024	14.5	13	891853
	AEPT060-00*-1*	45,000	34,000	14.5	13	517613
	ARPF36421A*	44,000	33,220	13.5	12	891819
	ARPT049-00*-1*	44,000	33,000	13.5	12	517590
	ARUF049-00*-1*	44,000	33,000	13.5	12	517578
	ARUF36421A*	44,000	33,220	13.5	12	892499
	ARUF48601A*	45,000	33,975	14	12.5	1038139
	CA*F060*2*+EEP	44,000	33,000	13.5	12	503763
	CA*F060*2*+G*V80905C**	44,000	33,000	14	12.5	521002
	CA*F060*2*+G*V90905D**	44,000	33,000	14	12.5	503764
	CA*F061*2*+EEP	45,000	34,000	14	12.5	503766
	CA*F061*2*+G*V81155C**	45,000	34,000	14.5	12.8	520990
	CA*F061*2*+G*V91155D**	45,000	34,000	14.5	12.8	503767
	CA*F3642*6A*+EEP	44,000	33,220	13.5	12	892575
	CA*F3642*6A*+G*V80905C**	44,000	33,220	14	12.5	891954
	CA*F3642*6A*+G*V90905D**	44,000	33,220	14	12.5	891611
	CA*F4860*6A*+EEP	45,000	33,975	14	12.5	892985
	CA*F4860*6A*+G*V81155C**	45,000	33,975	14.5	12.8	892709
	CA*F4860*6A*+G*V91155D**	45,000	33,975	14.5	12.8	892423
	CHPF048D2*+EEP	44,000	33,000	13.5	12	503773
	CHPF048D2*+G*V80905C**	44,000	33,000	14	12.5	520996
	CHPF048D2*+G*V90905D**	44,000	33,000	14	12.5	503774
	CHPF060D2*+EEP	45,000	34,000	14	12.5	503776
	CHPF060D2*+G*V81155C**	45,000	34,000	14.5	12.8	520998
	CHPF060D2*+G*V91155D**	45,000	34,000	14.5	12.8	503777
	CHPF3642D6A*+EEP	44,000	33,220	13.5	12	892982
	CHPF3642D6A*+G*V80905C**	44,000	33,220	14	12.5	892294
	CHPF3642D6A*+G*V90905D**	44,000	33,220	14	12.5	892408
	CHPF4860D6A*+EEP	45,000	33,975	14	12.5	893029
	CHPF4860D6A*+G*V81155C**	45,000	33,975	14.5	12.8	893157
	CHPF4860D6A*+G*V91155D**	45,000	33,975	14.5	12.8	891866
	CSCF3642N6A*+EEP	44,000	33,220	13.5	12	892873
	CSCF4860N6A*+EEP	45,000	33,975	14	12.5	891850
	CSCF4860N6A*+G*V81155C**	45,000	33,975	14.5	12.8	892553
	CSCF4860N6A*+G*V91155D**	45,000	33,975	14.5	12.8	891869
	H60F+EEP	44,000	33,000	13.5	12	503783
	H61F+EEP	45,000	34,000	14	12.5	503785
	H61F+G*V81155C**	45,000	34,000	14.5	12.8	529222
	H61F+G*V91155D**	45,000	34,000	14.5	12.8	529221

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- 2) XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CLQ60-1*	AEPF42601A*	55,000	39,600	14	12.5	892143
	AEPT060-00*-1*	55,000	39,600	14	12.5	517574
	ARPF48601A*	55,000	39,600	13.5	12	892702
	ARPT061-00*-1*	55,000	39,600	13.5	12	517554
	ARUF061-00*-1*	55,000	39,600	13.5	12	517607
	ARUF48601A*	55,000	39,600	13.5	12	891677
	CA*F060*2*+TXV+EEP	54,000	38,880	13.5	12	545753
	CA*F061*2*+EEP	55,000	39,600	13.5	12	503800
	CA*F061*2*+G*V80905C**	55,000	39,600	14.3	12.8	521009
	CA*F061*2*+G*V80905C**+TXV	55,000	39,600	14.3	12.8	549463
	CA*F061*2*+G*V81155C**	55,000	39,600	14.3	12.8	521013
	CA*F061*2*+G*V81155C**+TXV	55,000	39,600	14.3	13.3	549460
	CA*F061*2*+G*V90905D**	55,000	39,600	14.2	12.7	520820
	CA*F061*2*+G*V90905D**+TXV	55,000	39,600	14.2	12.7	549462
	CA*F061*2*+G*V91155D**	55,000	39,600	14.2	12.7	518832
	CA*F061*2*+G*V91155D**+TXV	55,000	39,600	14.2	12.7	549461
	CA*F061*2*+TXV+EEP	55,000	39,600	14	12.5	545754
	CA*F3642*6A*+TXV+EEP	54,000	38,880	13.5	12	891696
	CA*F4860*6A*+EEP	55,000	39,600	13.5	12	892998
	CA*F4860*6A*+G*V80905C**	55,000	39,600	14.3	12.8	892168
	CA*F4860*6A*+G*V80905C**+TXV	55,000	39,600	14.3	12.8	892974
	CA*F4860*6A*+G*V81155C**	55,000	39,600	14.3	13.3	892877
	CA*F4860*6A*+G*V81155C**+TXV	55,000	39,600	14.3	12.8	892304
	CA*F4860*6A*+G*V90905D**	55,000	39,600	14.2	12.7	892960
	CA*F4860*6A*+G*V90905D**+TXV	55,000	39,600	14.2	12.7	891951
	CA*F4860*6A*+G*V91155D**	55,000	39,600	14.2	12.7	891708
	CA*F4860*6A*+G*V91155D**+TXV	55,000	39,600	14.2	12.7	892640
	CA*F4860*6A*+TXV+EEP	55,000	39,600	14	12.5	892900
	CHPF048D2*+EEP	54,000	38,800	13.5	12	503805
	CHPF060D2*+EEP	55,000	39,600	14	12.5	503806
	CHPF060D2*+G*V80905C**	55,000	39,600	14.3	12.8	521004
	CHPF060D2*+G*V81155C**	55,000	39,600	14.3	12.8	521014
	CHPF060D2*+G*V90905D**	55,000	39,600	14.2	12.7	520832
	CHPF060D2*+G*V91155D**	55,000	39,600	14.2	12.7	520818
	CHPF3642D6A*+EEP	54,000	38,880	13.5	12	892198
	CHPF4860D6A*+EEP	55,000	39,600	14	12.5	893080
	CHPF4860D6A*+G*V80905C**	55,000	39,600	14.3	12.8	892970
	CHPF4860D6A*+G*V81155C**	55,000	39,600	14.3	12.8	892526
	CHPF4860D6A*+G*V90905D**	55,000	39,600	14.2	12.7	892324
	CHPF4860D6A*+G*V91155D**	55,000	39,600	14.2	12.7	892242
	CSCF3642N6A*+EEP	54,000	38,880	13.5	12.5	892565
	CSCF4860N6A*+EEP	55,000	39,600	14	12.5	892742
	CSCF4860N6A*+G*V81155C**	55,000	39,600	14.2	12.7	893112
	CSCF4860N6A*+G*V91155D**	55,000	39,600	14.2	12.7	892757
	H60F+EEP	54,000	38,800	13.5	12.5	503810
	H61F+EEP	55,000	39,600	14	12.5	503811
	H61F+G*V81155C**	55,000	39,600	14.2	12.7	527380
	H61F+G*V91155D**	55,000	39,600	14.2	12.7	527393



Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Copyright © 2006 • Goodman Manufacturing Company, L.P. • Houston, Texas
Goodman® brand products are proudly made in the USA.
Printed in the USA.