

# CASED EVAPORATOR A-COIL

## SPECIFICATION SHEET

### CCA/CHA



#### WARNING

**THIS PRODUCT IS SHIPPED FROM THE FACTORY UNDER HIGH PRESSURE!**



To avoid death, personal injury or property damage, relieve pressure **BEFORE** removing the copper caps from the manifold and distributor tubes. To relieve pressure, depress the Schraeder valve core on the manifold until pressure is gone.



#### CAUTION

Using coil sizes smaller than the minimum coil size recommended could cause condensate drip.

**NOTE: CHA\*\*TXC Models cannot be matched with furnaces.**

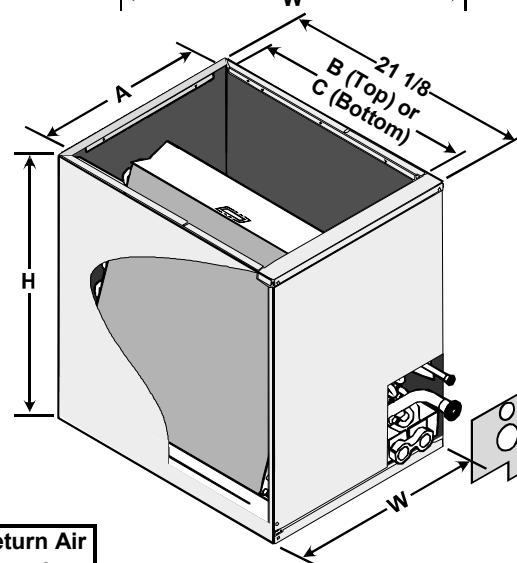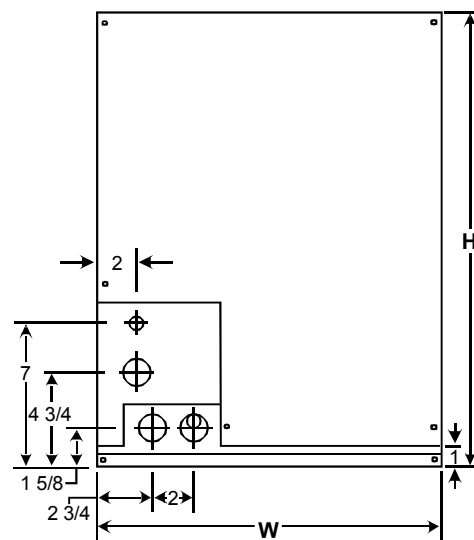

All dimensions in inches

| Cabinet Width (W) | A-Coil Model |            |            | Cabinet Height (H) | Supply Air Opening (A x B) | Return Air Opening (A x C) |
|-------------------|--------------|------------|------------|--------------------|----------------------------|----------------------------|
|                   | (CCA--F*C)   | (CHA--TCC) | (CHA--TXC) |                    |                            |                            |
| Small (16 1/2)    | CCA18FCC     |            |            | 14 1/4             | 15 x 18 3/4                | 15 x 20 3/16               |
|                   | CCA24FCC     | CHA18TCC   |            |                    |                            |                            |
|                   | CCA30FCC     | CHA24TCC   | CHA24TXC   | 18 1/4             |                            |                            |
|                   | CCA36FCC     | CHA30TCC   | CHA30TXC   |                    |                            |                            |
|                   | CCA42FCC     | CHA36TCC   | CHA36TXC   | 22 1/4             |                            |                            |
| Medium (20 1/2)   | CCA30FDC     |            |            | 22 1/4             | 19 x 18 3/4                | 19 x 18 3/4                |
|                   | CCA36FDC     |            |            |                    |                            |                            |
|                   | CCA42FDC     |            |            |                    |                            |                            |
|                   | CCA48FCC     | CHA42TCC   | CHA42TXC   |                    |                            |                            |
| Large (24 1/2)    | CCA36FKC     |            |            | 26 1/4             | 23 x 18 3/4                | 23 x 20 3/16               |
|                   | CCA48FDC     |            |            |                    |                            |                            |
|                   | CCA54FCC     | CHA48TCC   |            |                    |                            |                            |
|                   | CCA57FCC     | CHA54TCC   |            |                    |                            |                            |
|                   | CCA60FCC     | CHA57TCC   |            |                    |                            |                            |
|                   |              | CHA60TCC   | CHA60TXC   |                    |                            |                            |

| Counterflow Application Restrictions |                            |
|--------------------------------------|----------------------------|
| System Capacity                      | Minimum Coil Size Required |
| 18000 BTUH                           | CCA24****                  |
| 24000 BTUH                           | CCA24***                   |
| 30000 BTUH                           | CCA30***                   |
| 36000 BTUH                           | CCA36***                   |
| 42000 BTUH                           | CCA42***                   |
| 48000 BTUH                           | CCA54***                   |
| 60000 BTUH                           | CCA60***                   |

